

# Shower column New Nautic 2.2

Outlet up & down, 160 c-c, lead free, shower column

GUSTAVSBERG /  
SMARTER BATHROOMS



## Product features



- Safe Touch reduces the heat on the front of the faucet
- Maintains even water temperature upon pressure and temperature changes
- Completed with ceiling shower set

## Article number etc.

RSK-nr:

ART-nr:

EAN-nr:

GB412023300

7391530076348


Packaging

L: 780,00 x W: 226,00 x H: 90,00 mm.

Weight: 4,48 kg


## Energy labeling and certifications

- Complies with Safe Water installation requirements.



## Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

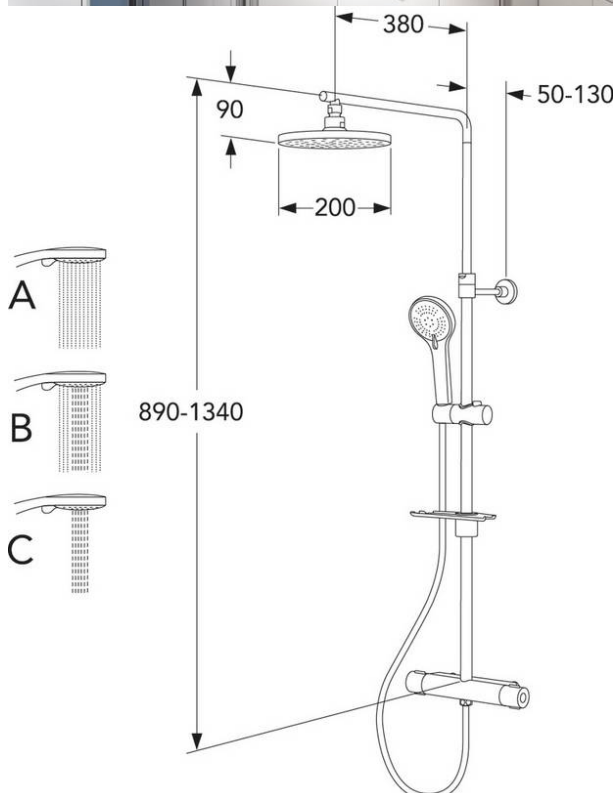

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg, Sweden / Tel: +46 (0) 8-570 391 00 | Fax +46 8 570 320 36 /

[www.gustavsberg.com](http://www.gustavsberg.com) / [info@gustavsberg.com](mailto:info@gustavsberg.com)