

GBG SA90G-C



Article Id :
UDW0090SKA100W-61

EAN Code :
4047289543800

The picture shows

Swinging door 90. Chromed profiles.

Description

The swinging doors are equipped for installation in alcoves with fixed side walls. The doors can be turned for left or right-hand installation. Made of 8 mm tempered clear safety glass. The rising hinges built into the wall profile lift the doors 5 mm during opening. The glass has the "Clearglass" outer coating. Profiles in superglazed anodized aluminum, in the range stated as chromed. Even if the walls or floors slope, you can still have a straight shower. Adjustable wall profiles, 20 mm, are standard. You can make holes for external pipe routing in the wall profiles. Skandic showers do not have a floor profile which means that they require a level floor with a slight slope towards the floor well. A fixed sill is included, which can be attached with glue or silicon sealant to the bathroom floor if there is insufficient slope to floor well. Measures shown in annex A* are applicable for outside of the wall profile and maximum measure is only obtainable with right-angled walls and floors. Extra width section available as separate product. Each width profiles increases the width measurement of the shower by 25 mm. Holes for external pipe routing in the wall profiles are not possible. The doors are closed by powerful magnetic strips. Detailed technical drawings for each product and size can be found at www.gustavsberg.com

Logistics

Weight: 40 kg with packaging

Width measurement/adjustment 880-920 mm.

Height 1,950 mm.

Complementary information

Complement with a suitable shower mixer and shower set - see mixer section.

Montage


According to supplied installation instructions

Variants

-

Accessories

GBG SE-C Widening profile, Chrome

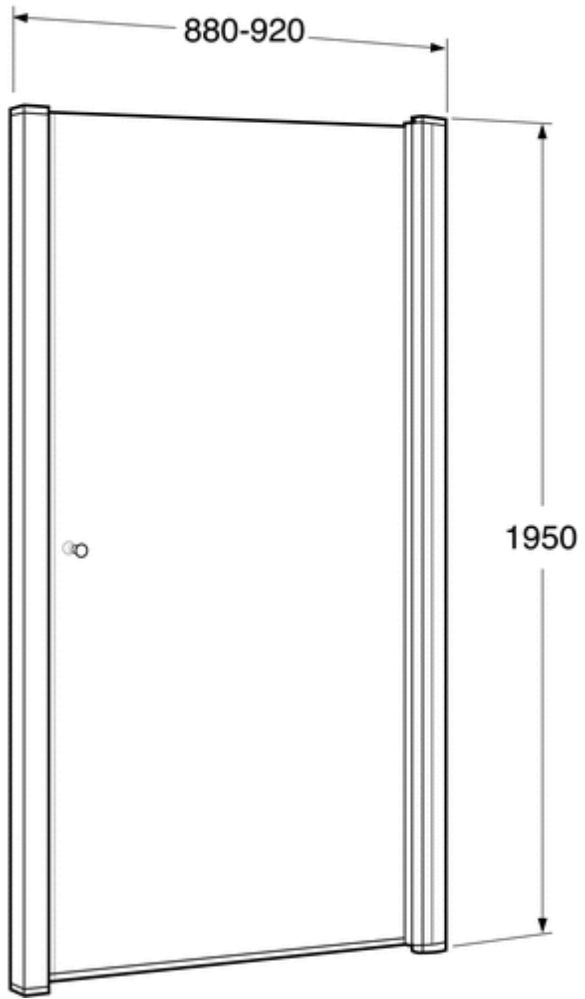

Copyright © 2007 Gustavsberg. All Rights Reserved