


Ny Nautic armatur til badekar – termostat

Blyfrit, fast badekarstud, udløb nedad, 160 c-c

GUSTAVSBERG /
SMARTERE BADEVÆRELSE

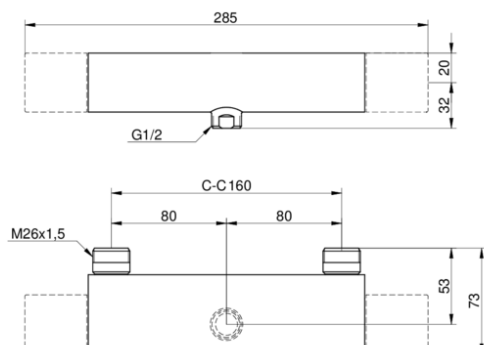

Produktegenskaber



- Contains less than 0.1% lead
- Maintains even water temperature during pressure and temperature changes
- Complete with 85 mm bathtub spout

Artikel nummer mv.

VVS-nr:

ART-nr:

EAN-nummer:

GB412023520

7391530081229

Emballage


L: 0,00 x W: 0,00 x H: 0,00 mm.

Vægt: 0,00 kg

Anbefalet cirkapris

(0 DKK ekskl. moms)

Energimærkning og certificeringer



Montering & Rengøring

Før installation skal ledningerne være skyllet rene frem til blandingsbatteriet. Blandingsbatteriet tilsluttes med koldtvandsledningen til højre og varmtvandsledningen til venstre. Vandtryk: maks. 1000 kPa, min. 50 kPa. Varmtvandstemperatur: maks. 80 °C, min. 45 °C. Vi påtager os intet ansvar for fejl, som er opstået på grund af forkert montering.

