


Ny Nautic brusearmatur – termostat, 40 c-c

Udløb nedad, tilslutning opad

GUSTAVSBERG /
SMARTERE BADEVÆRELSE

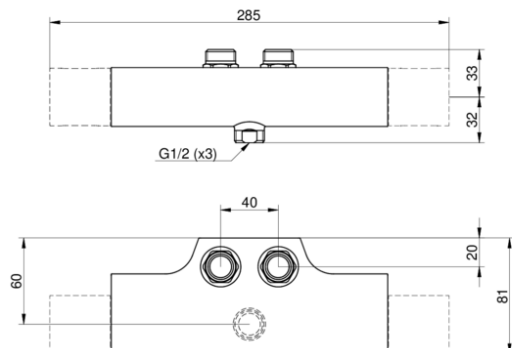

Produktegenskaber



- Safe Touch reduces the heat on the front of the mixer
- Maintains even water temperature during pressure and temperature changes
- Can be combined with bathtub spout

Artikel nummer mv.

VVS-nr:

ART-nr:

EAN-nummer:

GB41202427

7391530075839

Emballage


L: 292,00 x W: 95,00 x H: 74,00 mm.

Vægt: 1,88 kg

Anbefalet cirkapris

(0 DKK ekskl. moms)

Energimærkning og certificeringer



Montering & Rengøring

Før installation skal ledningerne være skyllet rene frem til blandingsbatteriet. Blandingsbatteriet tilsluttes med koldtvandsledningen til højre og varmtvandsledningen til venstre. Vandtryk: maks. 1000 kPa, min. 50 kPa. Varmtvandstemperatur: maks. 80 °C, min. 45 °C. Vi påtager os intet ansvar for fejl, som er opstået på grund af forkert montering.

