



Produktegenskaber



Hurtig
montering



- Easy grip lever with clear colour marking for hot and cold
- Soft move, technology for smooth and precise handling
- Pivoting spout 110° (0° and 60° block included)

Artikel nummer mv.

VVS-nr:

ART-nr:

EAN-nummer:

GB41206097R

7393792234825

Emballage


L: 440,00 x W: 275,00 x H: 75,00 mm.

Vægt: 1,80 kg



Anbefalet cirkapris

(0 DKK ekskl. moms)

Energimærkning og certificeringer



Denna produkt är anpassad till
Branschregler Saker Vatteninstallation
2021:1. Leverantören garanterar
produktens funktion om branschreglerna
och monteringsanvisningarna följs.

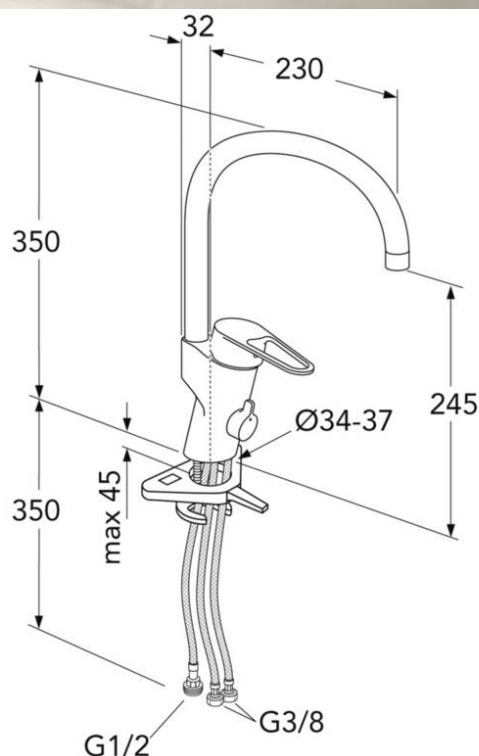

Montering & Rengøring

Før installation skal ledningerne skylles rene frem til armaturet. Armaturet tilsluttes med koldtvandsledningen til højre og varmtvandsledningen til venstre. Vandtryk: maks. 1000 kPa. Varmtvandstemperatur: maks. 70°C, min 45°C. Vi fralægger os ethvert ansvar for fejl opstået pga. fejlmontering.