

Tub faucet New Nautic - Thermostat

Downward shower connection and fixed bathtub spout, 160 c-c

GUSTAVSBERG /
SMARTER BATHROOMS



Product features



- Safe Touch, minimizes the heat on the front of the mixer
- Even water temperature during pressure and temperature changes
- To be completed with the wall shower

Article number etc.

RSK-nr:

ART-nr:

EAN-nr:

GB41202333


7391530075945

Packaging

L: 292,00 x W: 160,00 x H: 74,00 mm.

Weight: 2,05 kg


Energy labeling and certifications



Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

Dokumentet skapat den 2024-04-29

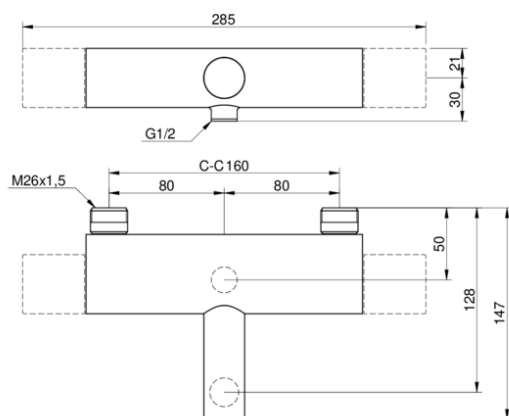

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg, Sweden / Tel: +46 (0) 8-570 391 00 | Fax +46 8 570 320 36 /

www.gustavsberg.com / info@gustavsberg.com