

Shower mixer New Nautic - Thermostat

Time valve, 150 c-c

GUSTAVSBERG /
SMARTER BATHROOMS



Product features



- Timed pressure valve flush time approx. 30 sec.
- Flow 9L/min
- Built-in automatic hot water shut-off for scalding protection

Article number etc.

RSK-nr:

ART-nr:

EAN-nr:

GB41212364


7391530075723

Packaging

L: 292,00 x W: 160,00 x H: 74,00 mm.


Weight: 2,10 kg

Energy labeling and certifications



Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

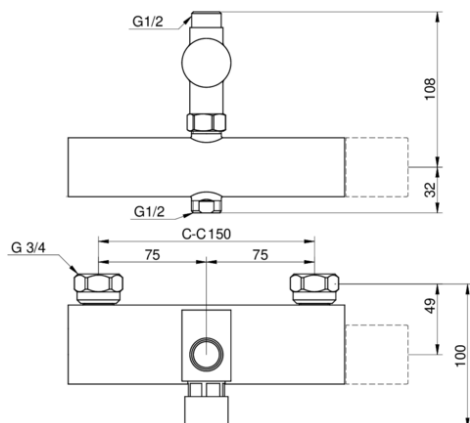

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg, Sweden / Tel: +46 (0) 8-570 391 00 | Fax +46 8 570 320 36 /

www.gustavsberg.com / info@gustavsberg.com