

Washbasin mixer New Nautic - 150 mm Spout

With side spray and wall bracket

GUSTAVSBERG /
SMARTER BATHROOMS



Product features

Quick fit



- Easy grip lever with clear colour marking for hot and cold
- Soft move, technology for smooth and precise handling
- Patented quick fixation nut for easy installation

Article number etc.

RSK-nr:

ART-nr:

EAN-nr:

GB41216145



7393792235068

Packaging

L: 295,00 x W: 290,00 x H: 75,00 mm.


Weight: 1,90 kg

Energy labeling and certifications



Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 70°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

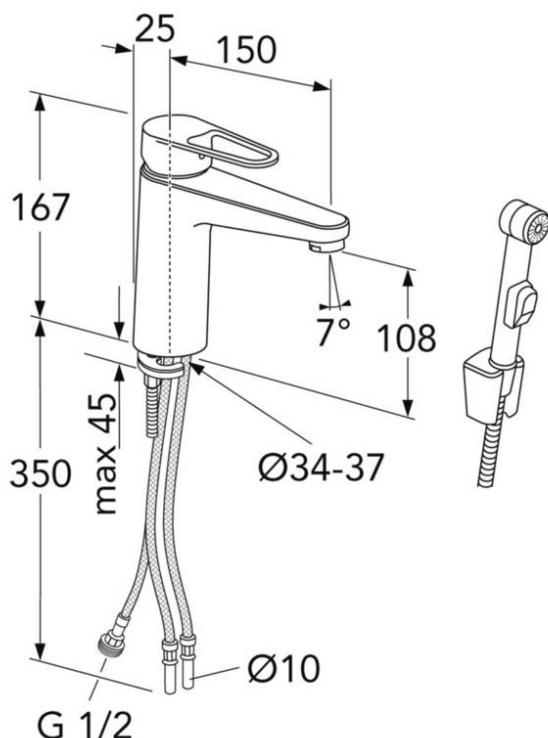

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg, Sweden / Tel: +46 (0) 8-570 391 00 | Fax +46 8 570 320 36 /

www.gustavsberg.com / info@gustavsberg.com