

Fixture Triomont XS - for toilet with wall control panel

Dual flush 4.5 or 3l and single flush 4.5l

GUSTAVSBERG /
SMARTER BATHROOMS



Product features

Installation
/ Mounting



- Flushing can be set to 4/2 l
- Large range of flush buttons in different materials and colours
- Suitable for installation on a straight wall or in a corner

Article number etc.

RSK-nr:

ART-nr:

EAN-nr:

GB1921102026

8711778215757




Packaging

L: 1160,00 x W: 400,00 x H: 150,00 mm.

Weight: 13,80 kg

Energy labeling and certifications

- SINTEF-certified Fixture in accordance with the standard SS 820200 Tank in accordance with EN 14055 Ready for AMA installation without any extra components (SE)

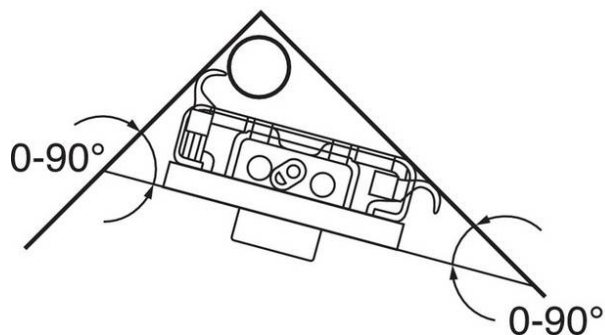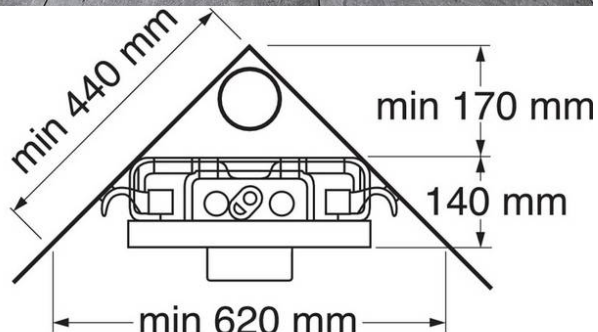

Assembling & Care

Mounted per included installation instructions. The height dimensions (1000 mm) of the drawing mean a seat height of 410-430 mm depending on the toilet model. Can when installed be adjusted up to 610-630 mm. Flexible bolt spacing for wall-mounted toilet installation, c-c 180 or 230 mm. With bolt spacing 180 c-c, all toilets from Gustavsberg and Villeroy & Boch fit.



Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg, Sweden / Tel: +46 (0) 8-570 391 00 | Fax +46 8 570 320 36 /

www.gustavsberg.com / info@gustavsberg.com