

Shower mixer New Nautic - Single lever

Shower connection downwards, 40/160 c-c bracket

GUSTAVSBERG /
SMARTER BATHROOMS



Product features

- Grip-friendly lever with clear color marking for hot and cold water
- With vacuum valve and check valves in the inlets
- Eco-stop, adjustable maximum flow limitation

Article number etc.

RSK-nr:

ART-nr:

EAN-nr:

GB41202114

7391530081793

Packaging


L: 365,00 x W: 105,00 x H: 70,00 mm.

Weight: 2,01 kg

Energy labeling and certifications

Assembling & Care

Prior to installation the lines must be flushed up to the faucet. The faucet is connected with the cold water line on the right and the hot water line on the left. Water pressure: max 1000 kPa, min 50kPa. Hot water temperature: max 80°C, min 45°C. Please note that we are not liable for damage resulting from improper installation.

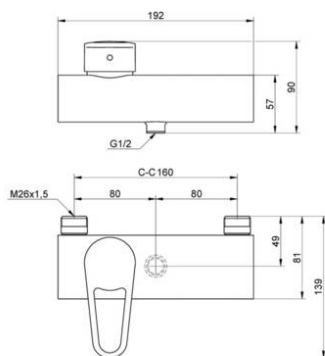

Villeroy & Boch Gustavsberg AB / Box 400, 134 29 Gustavsberg, Sweden / Tel: +46 (0) 8-570 391 00 | Fax +46 8 570 320 36 /

www.gustavsberg.com / info@gustavsberg.com