


GUSTAVSBERG/ WALL-MOUNTED

GUSTAVSBERG /
SMARTER BATHROOMS

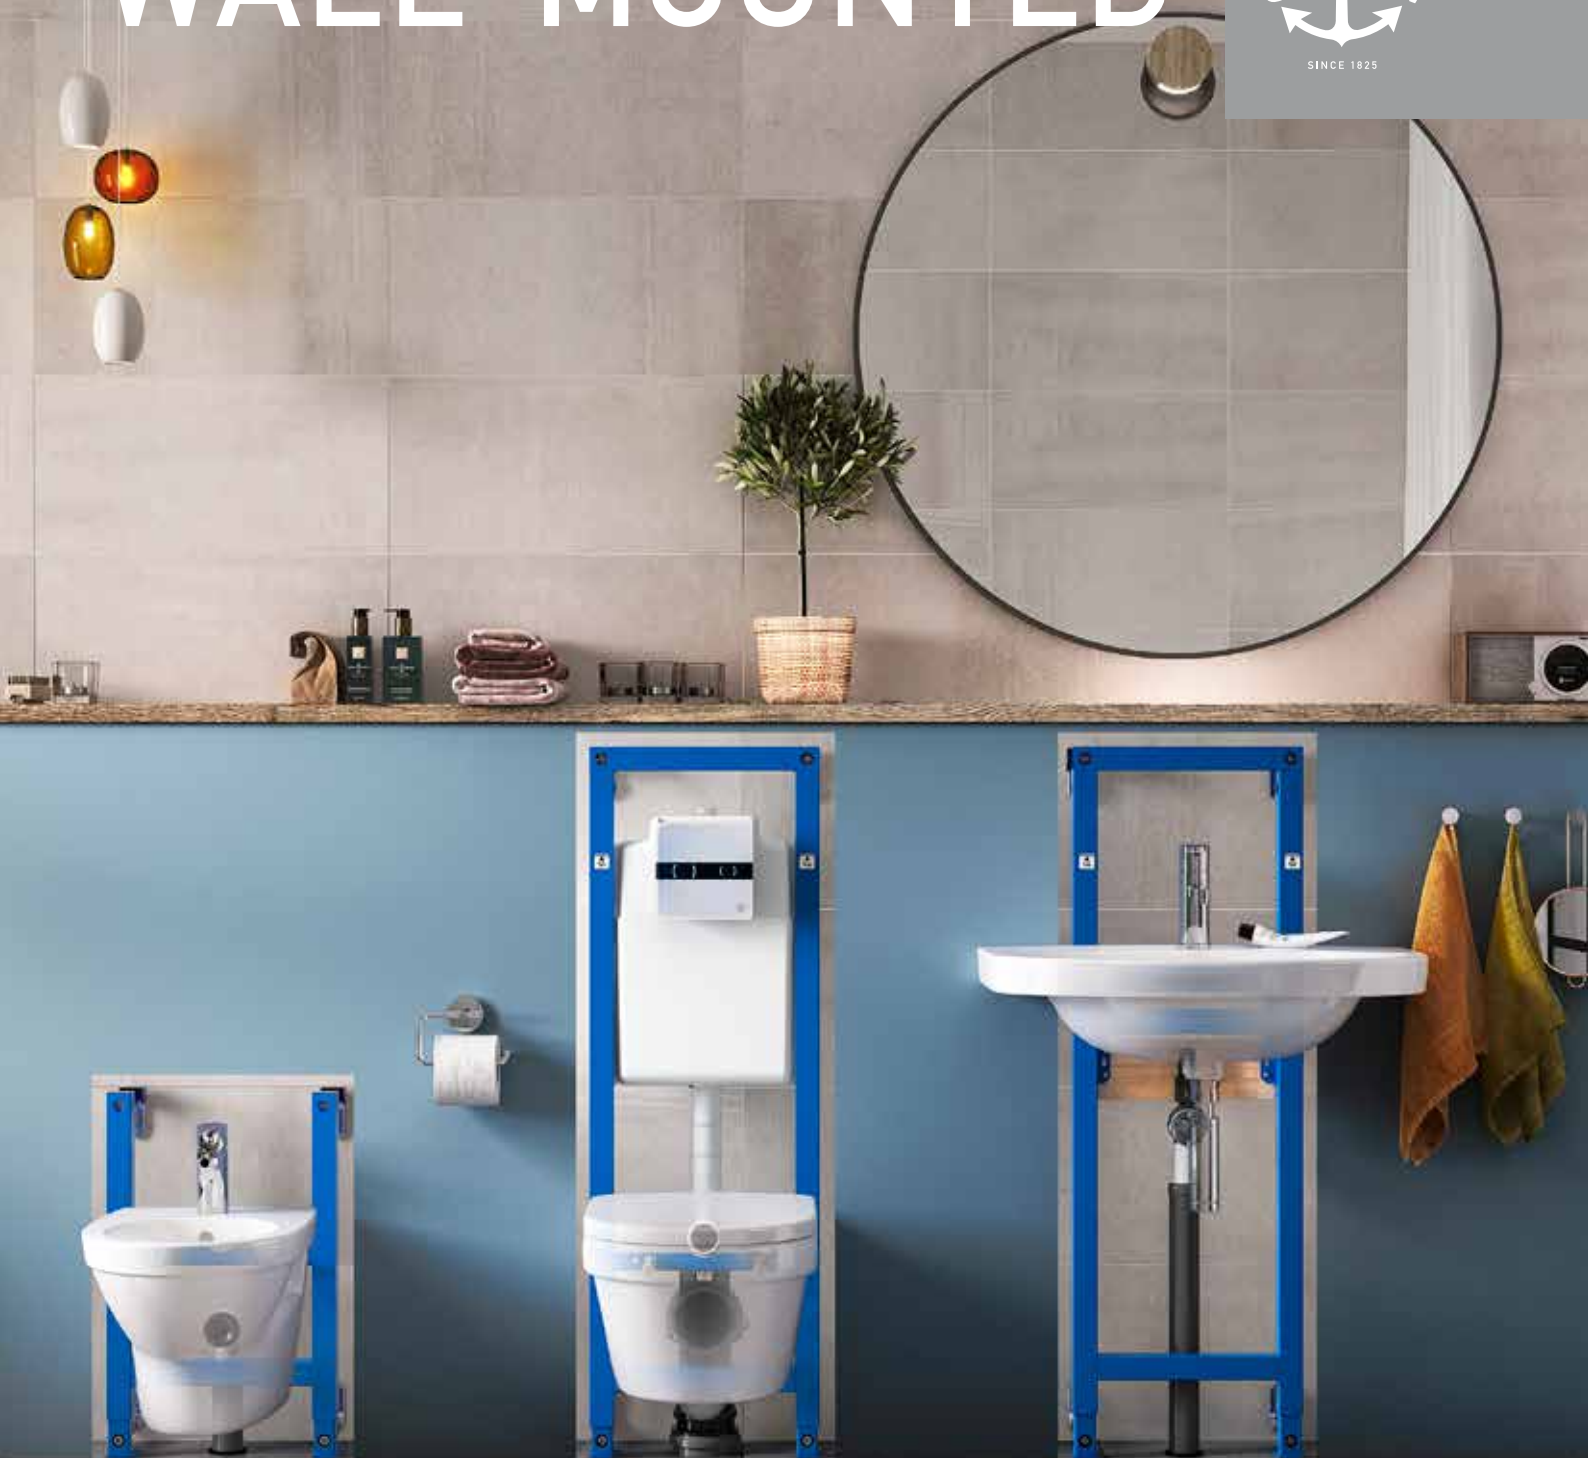

TRIOMONT – THE SIMPLEST SOLUTION FOR
WALL-MOUNTED TOILETS, BIDETS AND SINKS

BEFORE – OLD BATHROOM



14 CM IS ALL YOU NEED

Are you dreaming of a bathroom with wall-mounted porcelain? Triomont is a system from Gustavsberg that will make it quick and easy for you to bring your dream to life.

Triomont is simple to install and suits most bathrooms – there is no need for costly renovation work, and you can even install it in corners or small spaces with a minimum of surface loss. In fact, all you need is at least 14 cm of depth to a wall.

The space where you position the fixture must have a wet room membrane, but if you choose to install a Triomont solution behind an added wall in your existing bathroom, you have already dealt with that issue! Just make sure to seal any holes you drill in the bathroom wall tightly with silicone. This brochure presents a description of what you need to do to install a Triomont fixture from Gustavsberg in your existing bathroom. But you can, of course, use Triomont if you are building a new bathroom from scratch.

Just remember that special regulations and requirements apply to wet rooms. You can install most of our products yourself, but we recommend that you call on a professional fitter to help you with bathroom fixtures.

If you choose to do the work yourself, it is a good idea to consult a professional first – your reseller, for example, or a plumber or a specialist at your local DIY store.

DURING INSTALLATION – FIXTURE IN POSITION



Upper wall fitting. Can be replaced with a corner fitting for corner installation.



Distance between bolts (centre to centre): 180 or 230 mm. With a centre to centre distance of 180 mm, it suits all toilets from Gustavsberg and Villeroy & Boch.



Protective plugs fitted to protect the connections during installation.



Lead-through for pipe-in-pipe system – protective pipe, 18–28 mm. The picture shows a Triomont XT fixture. The XS model does not have the blue part.



Angled drain connection and eccentric sleeve, 90 x 110 mm for simple installation.



The bottom wall fitting eliminates the need to drill holes in the floor to install the fixture.



Installed 1 metre above the finished floor, it provides a sitting height of 410-430 mm, depending on chosen toilet model. On installation this can be adjusted up to 610-630 mm.



Wall-mounted control panel
Several models and colours are available. You can see them all on page 12.



Suits wall-mounted bidets and toilets (with external cistern) with a bolt distance of 180 or 230 mm.



All wall-mounted toilets from Gustavsberg and Villeroy & Boch can be used with the Triomont fixture. This allows you to choose from a wide variety of designs, and covers many special needs as well. The various models are presented later in this brochure.



Neat installation with a minimum of visible pipes. Suits all washbasins with a bolt distance (centre to centre) of up to 280 mm.



AFTER – NEW BATHROOM



NEAT, COMFORTABLE, PRACTICAL AND HYGIENIC

Wall-mounted bathroom products provide a range of benefits: They allow you to take full advantage of the bathroom space, and even make the room appear larger. In addition, they are hygienic and easy to clean. If you build a half wall, you can use the top of it for storage or as pure decoration. There are also fixtures for installing wall-mounted washbasins and bidets. This makes it simple for you to carry out a neat, stable installation without having to reinforce the walls. And with the wall-fitted drain connection, almost all the pipework will be hidden from view.

GOOD TO KNOW

Triomont is a simple and flexible system, both for the fitters and for the people who use the bathroom.


TOP QUALITY – CAN HANDLE UP TO 400 KG!

The design and the materials are of the highest quality, and the Triomont toilet fixture meets the most stringent test requirements for load bearing: 400 kg.


SIMPLE TO INSTALL WALL-MOUNTED TOILET

The Triomont fixture suits most bathrooms and helps avoid large and costly remodelling. All that is required is a floor surface of minimum 14 cm of space next to the wall. In other words, the remodelled toilet need not take up more space than a floor-mounted model.

FLOOR-MOUNTED
TOILET

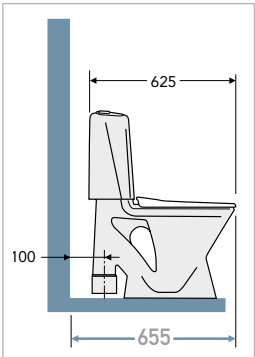

REPLACE WITH A WALL-MOUNTED
TOILET ON A TRIOMONT FIXTURE

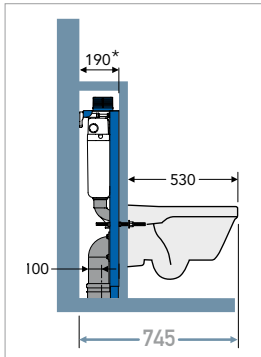

*) The example presents the dimensions where the centre of the drain is 100 mm from the wall.

THREE TRIOMONT SOLUTIONS FOR TOILETS



BEHIND A HALF WALL



BEHIND A FULL WALL



IN A CORNER

CONTROL PANELS TO SUIT ALL TASTES

A variety of models and materials make it easy for you to find a style that matches your taste and bathroom layout: For wall or top mounting, for single or double flush, and for sensor-operated, mechanical or pneumatic flushing. All the different options are presented on page 12.



WIDEST RANGE OF WALL-MOUNTED TOILETS

Triomont fixtures can be used for all wall-mounted toilets from Gustavsberg/Villeroy & Boch.

There are toilets for small bathrooms, as well as models designed especially for children, for tall, short and plus size people, and for people with physical disabilities. We supply the largest range of wall-mounted toilets on the market, making it easy for you to make the best choice for you. The various models are presented later in this brochure.

SMART DETAILS TO FACILITATE INSTALLATION

In order to facilitate handling and to prevent damage during installation, the fixtures are supplied with protective covers for the toilet and wall-mounted flush connections. No special tools are required to maintain or to replace the float and flush valve. The shut-off valve is easily accessible in the cistern. The cistern itself is accessed either through the hole behind the button or via the top panel of a half wall.

DIMENSIONS, FITTING AND PROTECTION AGAINST WATER DAMAGE

The fixture is just 380 mm wide, which means it fits neatly into corners and compact spaces, and special brackets are available to make corner mounting even easier. Thanks to the slim dimensions, the fixture is suitable for walls with a centre-to-centre stud distance of 450 mm. Four wall brackets are included in the delivery so there is no need for you to drill into the floor – which is the cause of most water damage. The distance between the bolts for fixing the wall-mounted toilet in place is 180 or 230 mm to accommodate different models.

SAFE BAG – WHEN THERE IS NO WET ROOM MEMBRANE

SafeBag is easy to fit and provides leak protection in places where the fixture is installed in rooms without a wet room membrane – guest toilets, for example.

PLUMBING

The water connection to the toilet can be made from the top or from the side of the cistern (see the installation instructions for the individual models). Extra-long drain pipes/flush pipes for thick walls are included. The cistern is designed for connection using pipe-in-pipe technology. Can accommodate protective pipes with a dimension of 18–28 mm. An eccentric drain reduction sleeve – 90/110 mm – is also included. It is simple to fit the drain trap, which is easy to rotate if the connection is located to the right or to the left of the fixture. Insulation protection for fitting between the porcelain and the wall is included. This evens out minor irregularities in the wall behind the toilet.

WALL-MOUNTED BIDETS AND TOILETS WITH EXTERNAL CISTERNS

The Triomont toilet/bidet fixture can be used with all wall-mounted bidets and toilets with an external cistern and with a distance between bolts of 180 or 230 mm.

WASHBASIN WITH NO VISIBLE PIPES

The washbasin fixture can be used for all washbasins with a centre-to-centre bolt distance of up to 280 mm. The advantage of this solution is that it conceals all water and drain pipes. To see all the washbasin models, visit the Gustavsberg website. These models also feature in the bathroom brochure that you can download or order online at www.gustavsberg.se.

IMPORTANT TO REMEMBER:



Make sure to perform the installation professionally according to the guidelines supplied and the applicable construction regulations. This will eliminate the risk of water damage.



You can also watch our installation video online at www.gustavsberg.com.

SENSOR-CONTROLLED PANEL

Sensor-controlled flushing was originally developed for public settings. Touch-free technology improves hygiene and makes things easier for users with disabilities. With a wall-mounted toilet from Gustavsberg, combined with a designer, sensor-controlled panel, your bathroom will be more hygienic, more practical – and seriously cool!



FULL CONTROL WITH A FINELY DESIGNED APP

The Gustavsberg app makes it easy to change the sensor-controlled flush settings via your mobile phone or tablet. For example, you can choose to have the toilet “wake up” when you approach, or flush when you walk away. This is naturally a fantastic solution for public settings – and for home environments, where some family members may



TRIOMONT

be careless or a bit forgetful ... You can also define and adjust automatic flushing at set intervals. The app also lets you control the flush button light settings. LED lighting opens the door to every colour choice imaginable! More information can be found at www.gustavsberg.se. The app is found where apps are available. Download free of charge, it is called Gustavsberg Triomont.





FLUSH NEATLY. FLUSH SMARTLY.

Control panels in a variety of models and materials make it easy for you to find a style that matches your taste and bathroom layout. You can choose between wall-mounted and top-mounted panels, and there is even a pneumatic version. Or why not choose the latest model, which is sensor controlled and therefore touch-free. It is the control panel that determines whether you can have a single or dual flush.

1 Wall-mounted control panel


Mechanical, sensor-controlled or pneumatic panel for placing in a fixed position on the wall above the toilet.

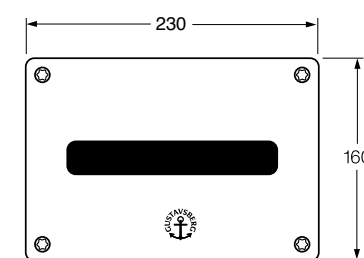

Sensor-controlled panel designed for public settings has different dimensions to other wall-mounted panels.


2 Top-mounted control panel

Mechanical or pneumatic panel for placing in a fixed position on top of a half-wall.

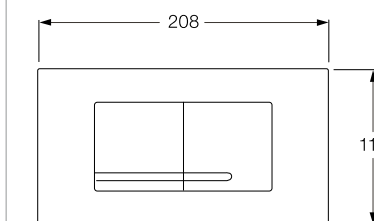

3 Pneumatic flush button

Air-controlled single-flush button that you can position anywhere within 1.5 m of the fixture.

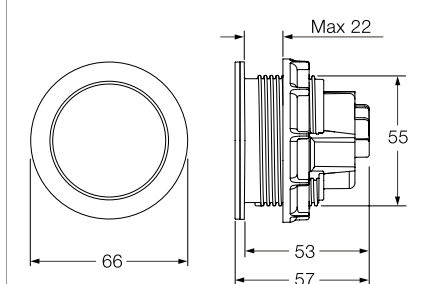


Always install some type of inspection hatch to access the valves in the cistern when selecting the pneumatic flush button

TRIOMONT CONTROL PANELS


- Numerous models and materials to choose from.
- The panel you choose determines single or dual flush.
- Dimension sketches for panels – see page 11.

NB The header line for the different control panels below states whether they match fixture XS or XT. Please make sure to choose a panel that matches the fixture you have ordered.


WALL-MOUNTED CONTROL PANELS, DUAL FLUSH for Triomont XS



White
ART-no GB1921102035



Matte chrome
ART-no GB1921102036



Shiny chrome
ART-no GB1921102037



White
ART-no GB1921102052



Shiny chrome
ART-no GB1921102053



White metal, without logo
ART-no GB1921102045




Shiny chrome, metal, without logo
ART-no GB1921102047




Stainless
ART-no GB1921102054



White, glass
ART-no GB1921102056



Black, glass
ART-no GB1921102057



Aluminium
ART-no GB1921102058

WALL-MOUNTED CONTROL PANELS, SINGLE FLUSH for Triomont XS



White
ART-no GB1921102030



Shiny chrome
ART-no GB1921102032



White
ART-no GB1921102060



Shiny chrome
ART-no GB1921102061



White, glass
ART-no GB1921102066



Black, glass
ART-no GB1921102067

SENSOR-CONTROLLED WALL-MOUNTED CONTROL PANELS, DUAL FLUSH for Triomont XS



White
ART-no GB1921102070



For public settings, stainless
ART-no GB1921102071

PNEUMATIC TOP-MOUNTED CONTROL PANELS, DUAL FLUSH for Triomont XT



White
ART-no GB1921102085



Shiny chrome
ART-no GB1921102086

PNEUMATIC WALL-MOUNTED CONTROL PANELS, DUAL FLUSH for Triomont XS



White
ART-no GB1921102060



Shiny chrome
ART-no GB1921102061



White, glass
ART-no GB1921102066



Black, glass
ART-no GB1921102067

TOP-MOUNTED CONTROL PANELS for Triomont XT



White
ART-no GB1921102080



Shiny chrome
ART-no GB1921102081



White, glass
ART-no GB1921102082



Svart, glass
ART-no GB1921102083










PNEUMATIC BUTTON, SINGLE FLUSH for all fixture models

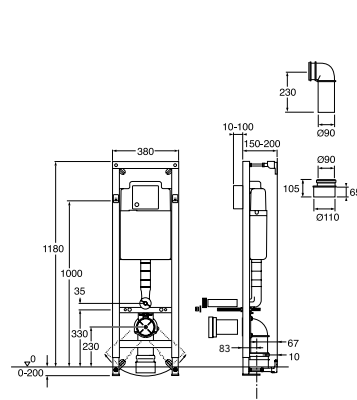

Stainless
ART-no GB1921102092

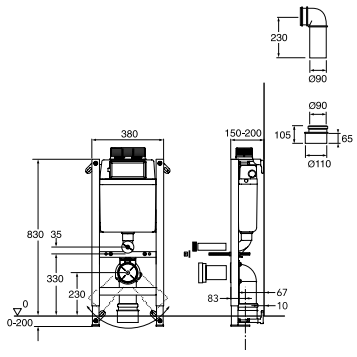TRIOMONT TOILET FIXTURE

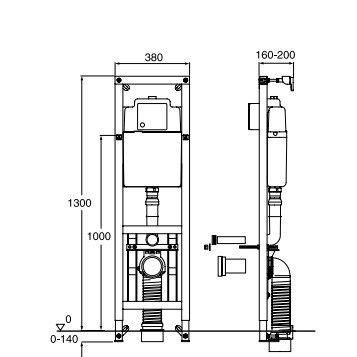- Neat installation with a minimum of visible pipes.
 - Wide range of control panels in a variety of styles.
 - Choose high or low flush volume.
 - We supply the widest range of wall-mounted WCs on the market.
 - Adjustable flush volume – see installation instructions supplied.
 - Space-efficient design, just 380 mm wide.
 - Wall fittings included. No need to drill holes in the floor.
 - Rotatable wall fittings for a flexible wall connection.
- Sitting height 410–630 mm.
Recommended sitting height, 450 mm above the floor.
 - Floor- or wall-connected drain.
 - Load tested to 400 kg.
 - Fixture in line with SS 820200 standard.
 - Cistern in line with EN 14055.
 - Suitable for AMA installation without extra components (SE).

		<p>Triomont XS fixture for wall-mounted or pneumatic control panel High model for fitting against a straight wall or in a corner. Add a control panel and wall-mounted toilet to complete. The control panel determines the type of flush, see page 12.</p> <p>Triomont XS, dual flush 4.5/3-litre or single flush 4.5-litre Triomont XS, dual flush 6/3-litre or single flush 6-litre</p> <p>Accessories: SafeBag is a leak protection for cases where the fixture is installed in rooms without a wet room membrane – guest toilets, for example. Corner fitting for corner installation Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p> Installation: The height on the sketch (1000 mm) results in a toilet seat height of 410-430 mm, depending on toilet model. On installation, this can be adjusted up to 610-630 mm. Weight: 14 kg including packaging.</p>	ART-no GB1921102026 GB1921102021 GB1921102034 GB1921102029 GB1921102027
		<p>Triomont XT fixture for top-mounted or pneumatic control panel Low model for fitting against a straight wall. Add a control panel and wall-mounted toilet to complete. The control panel determines the type of flush, see page 12</p> <p>Triomont XT, dual flush 6/3-litre or single flush 6-litre.</p> <p>Accessories: Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p> Installation: The height on the sketch (830 mm) results in a toilet seat height of 410-430 mm depending on toilet model. On installation, this can be adjusted up to 610-630 mm. Weight: 12 kg including packaging</p>	GB1921102024 GB1921102027
		<p>Triomont XS Vario fixture for wall-mounted or pneumatic control panel Primarily intended for hospitals and care homes. High model for fitting against a straight wall or in a corner. With adjustable sitting height after installation. Add a control panel and wall-mounted toilet to complete. The control panel determines the type of flush, see page 12.</p> <p>Triomont XS Vario, dual flush 6/3-litre or single flush 6-litre.</p> <p>Accessories: Corner fitting for corner installation Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p> Installation: The height on the sketch (1000 mm) results in a toilet seat height of 410-430 mm, depending on toilet model. On installation, this can be adjusted up to 610-630 mm. After installation, the toilet can be raised 100 mm. It can naturally also be returned to its original position. Weight: 19 kg including packaging.</p>	GB1921102022 GB1921102029 GB1921102027

Triomont toilet fixture deliveries include:

- Fixture with four wall fittings..
- Complete cistern insulated against condensation, with flush fitting and shut-off valve
- Connection components for drain and water supply (pipe in pipe)
- Hole template for button.

- M12 threaded bars for fitting the toilet.
- Protection plugs.
- Screws and plugs for fixing.
- Insulation protection for fitting between the porcelain and the wall.
- Drilling template for wall.
- Installation instructions.

Always finish off with

- wall-mounted toilet.
- control panel.

TRIOMONT WASHBASIN FIXTURE

- Neat installation with a minimum of visible pipes.
- Suits all washbasins with a bolt distance (centre to centre) of up to 280 mm.
- Load tested to 175 kg.

		Triomont XS washbasin fixture. Tall model for fitting against a straight wall or in a corner.	ART-no
		Triomont XS washbasin fixture Accessories: Corner fitting for corner installation Extra wall fitting (when the bottom fitting supplied cannot be used)).	GB1921102100 GB1921102029 GB1921102027
		Weight: 11 kg including packaging	

- Triomont washbasin fixture deliveries include:
- Fixture with four wall fittings.
 - M12 threaded bars for fitting the washbasin.
 - Screws and plugs for fixing.
- Angled drain connection with Ø 32 mm rubber nipple.
 - Installation instructions.
- Always finish off with:
- Washbasin.
 - Washbasin mixer.
 - Wall-fitted water trap.
- See the full range at www.gustavsberg.se

FIXTURE FOR WALL-MOUNTED BIDETS AND TOILETS WITH EXTERNAL CISTERNS

- Neat installation with a minimum of visible pipes
- Load tested to 400 kg.
- Suits wall-mounted bidets and toilets (with external cistern) with a bolt distance of 180 or 230 mm.
- For floor- or wall-connected drain.
- Sitting height 410–610 mm. Recommended sitting height, 450 mm above the floor.

		Triomont toilet/bidet fixture. Tall model for fitting against a straight wall or in a corner.	ART-no
		Accessories: Corner fitting for corner installation Extra wall fitting (when the lower fitting supplied cannot be used)	GB1921102100 GB1921102029 GB1921102027
		Weight: 9 kg including packaging	

- Triomont toilet/bidet fixture deliveries include:
- Fixture with four wall fittings.
 - M12 threaded bars for fitting the bidet/toilet.
- Screws and plugs for fixing.
 - Drain connection for toilet.
 - Installation instructions.
- Always finish off with:
- Bidet or toilet.
- See the full range at www.gustavsberg.com

WALL-MOUNTED TOILETS GUSTAVSBERG

- Made of hygienic, durable and tightly vitrified sanitary porcelain.
- Suits our Triomont fixtures.
- All Gustavsberg wall mounted toilets have distance between bolts (center to center) of 180 mm or 230 mm
- Load tested to 400 kg.
- Multiple seat options
- Seat with Soft Close (SC) for gentle, quiet closing, and Quick Release (QR) for easier cleaning.
- Ceramicplus (C+) for quick, ecofriendly cleaning.
- Hygienic Flush with open flush rim for easier cleaning. Flushes all the way up to the rim for improved hygiene.

		8330 Estetic for wall-mounting. Wall-mounted toilet with open flush rim, with C+. Neat and simple installation with Suprafix. Designed for wall-mounting with a fixture featuring a built-in cistern White with white hard seat featuring SC/QR White with white hard seat Matte white with white hard seat featuring SC/QR Black with black hard seat featuring SC/QR	ART-no
			GB1183300R1030 GB1183300R1020 GB1183300S3030 GB1183300S0030
		5G84 Hygienic Flush toilet for wall mounting Wall-mounted toilet with open flush rim. Designed for wall-mounting with a fixture featuring a built-in cistern With white hard seat with SC/QR Without seat SEATS White hard seat with SC/QR Black hard seat with SC/QR	5G84 HR 01 5G84 R0 01 9M16S101 9M16S136
			
		4G01 Care for wall mounting, extended model Wall-mounted toilet with open flush rim. Extended model for simpler transfer between wheelchair and toilet. Designed for wall-mounting with a fixture featuring a built-in cistern Without seat SEATS White hard seat with fixed fittings White hard seat with SC/QR	4G01 R0 01 9M67 61 01 9M38 S1 01
			
		4G95 Care for wall mounting, elevated model Wall-mounted toilet with open flush rim. For fitting on existing fixtures where an elevated sitting height is desired. Designed for wall-mounting with a fixture featuring a built-in cistern Without seat SEATS White hard seat with fixed fittings White hard seat with SC/QR	4G95 R0 01 9M67 61 01 9M38 S1 01
			

		<p>1522 Nautic Hygienic Flush wall-mounted with tank Wall-mounted toilet with open flush rim. Space between wall and tank facilitates cleaning. With raised flush button.</p> <p>Dual flush, 2/4 litre With white hard seat featuring SC/QR and C+ With hard white seat featuring SC/QR</p> <p>Single flush, 4 litre. With white hard seat featuring SC/QR and C+</p>	ART-no	GB1115002R1231 GB111522201231
		<p>1522 Nautic Hygienic Flush wall-mounted with tank Wall-mounted toilet with open flush rim. Space between wall and tank facilitates cleaning. With raised flush button.</p> <p>Dual flush, 2/4 litre With white standard seat Without seat</p> <p>Single flush, 4 litre. With white standard seat</p> <p>SEATS 9M24 Standard seat 9M25 Hard seat with stainless steel fittings 9M26 Hard seat with SC/CR 9M26 Hard seat with SC/CR, black</p>	GB111522201211 GB111522201205	GB111522401211
		<p>5530 Nautic WC bowl for wall-mounting The cistern is not included in the delivery. If the walls are not so sturdy, the bowl must be mounted on a fixture.</p> <p>Without seat. With C+ With white standard seat</p> <p>SEATS 9M24 Standard seat 9M25 Hard seat with stainless steel fittings 9M26 Hard seat with SC/CR 9M26 Hard seat with SC/CR, black</p>	GB1155300R1000 GB115530001010	9M246101 9M256101 9M265101 9M265136
		<p>3530 Nordic3 toilet bowl for wall-mounting For wall-mounting with built-in cistern. Cistern not included in the delivery. Always install on fixture.</p> <p>Without seat With white standard seat</p> <p>SEATS 8780 Nordic³ hard plastic seat, white 9M64 Nordic³ standard seat, white</p>	GB113530001000 GB113530001010	8780G101 9M646101
		<p>4330 Artic WC bowl for wall-mounting The cistern is not included in the delivery. If the walls are not so sturdy, the bowl must be mounted on a fixture.</p> <p>White with hard white seat with SC/QR White with hard white seat with SC/QR. With C+ Black with hard black seat with SC/QR. With C+</p>	GB114330201231 GB1143302R1231 GB114330BLACK	

SMART SYMBOLS FOR SMART SOLUTIONS



HYGIENIC FLUSH

Smarter flushing for improved hygiene and easier cleaning. The innovative design with an open flush rim and smooth surfaces eliminates all potential dirt traps. Hygienic Flush minimises the need to use strong cleaning agents.



CERAMICPLUS = C+

Many of our products are available with Ceramicplus surface treatment. This provides the porcelain with a dirt-repellent surface that prevents the accumulation of limescale and dirt. Ceramicplus is also good for the environment as it means that you can use a milder detergent – and less of it! – when cleaning.




SOFT CLOSE

Hard, authentic toilet seats have previously been associated with loud noises when they are closed. Soft Close functionality has solved this problem through the introduction of a damper that is built into the seat to ensure that it can be lowered gently and quietly. The damper has no direct contact with the porcelain, which facilitates cleaning and makes the seat more hygienic.



QUICK RELEASE

The Quick Release function makes it simple to remove the seat from the toilet without using tools. The seat and toilet can then be cleaned separately, which is both easier and more hygienic.




NO ROOM FOR DIRT

On all toilets with a visible cistern, the “seam” between the seating ring and the cistern has been filled out. A soft curve in the porcelain simplifies cleaning and prevents the build-up of dirt. The foot of the toilet is smooth to facilitate cleaning and improve hygiene.



QUIET AND DRY

The fully encompassing porcelain cover conceals a separate inner tank. This reduces noise and counteracts the build-up of condensation on the porcelain cover, helping prevent the accumulation of dust.



SUPRAFIX

Concealed wall fitting for invisible installation of wall-mounted toilets. A neater design free from dirt traps facilitates cleaning and improves hygiene. The patented Suprafix system simplifies installation of your wall-mounted toilet, saves time and eases the strain on your muscles.



MOUNTING

You can install most of the products yourself. However, this symbol means that we recommend that you consult a skilled professional, such as a plumber, a tiler or an electrician.

CAN'T FIND THE ONE YOU'RE LOOKING FOR?

– WE HAVE OTHER TOILETS WITH THE SAME UNIQUE FLUSHING TECHNOLOGY



Villeroy & Boch is one of the leading bathroom suppliers in Europe, and has been manufacturing innovative bathroom products for more than 270 years. Since year 2000, Villeroy & Boch has owned Gustavsberg, opening up fantastic options for you to combine the best of these two bathroom worlds – and we promise that there really is something for everyone. When it comes to wall-mounted toilets, Villeroy & Boch

has a broad range to match all budgets. This brochure presents a selection from our range, where all models can be installed using the Triomont fixture. Moreover, all toilets in the selection feature Direct Flush – the smart flushing function known as “Hygienic Flush’ at Gustavsberg. To view the full range of Villeroy & Boch bathroom products, contact us or visit villeroy-boch.com.



Our patented suprafix system makes it easy to install wall-mounted toilets quickly and neatly. To watch the video about suprafix, go to [youtube.Com/gustavsbergfilm](https://youtube.com/gustavsbergfilm).

WALL-MOUNTED TOILETS, VILLEROY & BOCH

- Made of hygienic, durable and tightly vitrified sanitary porcelain.
- The porcelain has the same white colour as Gustavsberg porcelain.
- Suits our Triomont fixtures.
- Direct Flush with open flush rim for easier cleaning. Flushes all the way up to the rim for improved hygiene.
- Ceramicplus (C+) for quick, ecofriendly cleaning.
- Seat with Soft Close (SC) for gentle, quiet closing, and Quick Release (QR) for easier cleaning.
- Load tested to 400 kg.
- Distance between bolts (centre to center) 180 mm.

		O.novo Wall-mountedtoilet with open flush rim. Standard design with traditional shape. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat with SC/QR	ART-no 5660 R0 01 5660 R0 R1 9M38 S1 01
		Venticello Wall-mounted toilet with open flush rim. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat – no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat, slimseat line with SC/QR White hard seat, slimseat wrap with SC/QR	4611 R0 01 4611 R0 R1 9M80 S1 01 9M79 S1 01

WALL-MOUNTED TOILETS, VILLEROY & BOCH. CONTINUATION

		Vivia Comfort Wall-mounted toilet with open flush rim. Broader and longer interior dimensions to improve sitting comfort. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat, comfort with SC/QR	ART-no 4642 R0 01 4642 R0 R1 9M82 S1 01
		Legato Wall-mounted toilet with open flush rim. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat – no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat, slimseat line with SC/QR White hard seat, slimseat wrap with SC/QR	5663 R0 01 5663 R0 R1 9M96 S1 01 9M95 S1 01
		Subway 2.0 Wall-mounted toilet with open flush rim. The model features a neat design with a smooth exterior. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat with SC/QR White hard seat, slimseat with SC/QR	5614 R0 01 5614 R0 R1 9M68 S1 01 9M78 S1 01
		Subway 2.0 Compact Wall-mounted toilet with open flush rim. Just like the model above, but with compact dimensions – only 480 mm. Ideal for small bathrooms. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat with SC/QR	5606 R0 01 5606 R0 R1 9M69 S1 01
		Subway 2.0 Comfort Wall-mounted toilet with open flush rim. Broader and longer interior dimensions to improve sitting comfort. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Without seat Without seat, with C+ White hard seat, comfort with SC/QR	4609 R0 01 4609 R0 R1 9M86 S1 01
		Architectura Wall-mounted toilet in a modern design with an open flush rim. Designed for wall-mounting with a fixture featuring a built-in cistern. With white hard seat with SC/QR With white hard seat featuring SC/QR, with C+	5685 HR 01 5685 HR R1

With models from Villeroy & Boch we have the market's widest range of wall mounted toilets. See several models at www.villeroy-boch.com

TO SEE OUR ENTIRE PRODUCT
RANGE AND FOR EVEN MORE
INSPIRATION VISIT OUR WEBSITE
AT GUSTAVSBERG.COM. WELCOME!



SUPPORT AND SERVICE

Our website also contains manuals and instruction videos, as well as tips and hints to help you use and care for your Gustavsberg products. To contact our customer service staff, email us at info@gustavsberg.com



A MEMBER OF THE
VILLEROY & BOCH GROUP

Villeroy & Boch Gustavsberg AB
PO Box 400, SE-134 29 Gustavsberg
Telefon +46 8-570 391 00
www.gustavsberg.se info@gustavsberg.com