



SMARTER  
BATHROOMS

# HYGIENIC FLUSH

MAKES IT CHILD'S PLAY TO KEEP CLEAN

NEW!  
HYGIENIC  
FLUSH  
EASIER TO CLEAN WITH  
SMARTER FLUSHING



## HYGIENIC FLUSH



SMARTER FLUSHING FOR IMPROVED HYGIENE AND EASIER CLEANING. THE INNOVATIVE DESIGN WITH AN OPEN FLUSH RIM AND SMOOTH SURFACES ELIMINATES ALL POTENTIAL DIRT TRAPS. HYGIENIC FLUSH MINIMISES THE NEED TO USE STRONG CLEANING AGENTS.



## HYGIENIC FLUSH


- Open rim provides simpler cleaning
- Made of hygienic, durable and densely sintered ceramic sanitary ware.
- Easy to clean and minimalistic design.
- Centre to centre bolt-distance 180 mm.
- Can be combined with Triomont fixtures
- Load tested to 400 kg.
- Multiple seat options.
- Seat with Soft Close (SC) ensures a gentle and quiet closing and Quick release (QR) provides simpler cleaning for better hygiene.

			ART no
		<p><b>5G84 Hygienic Flush WC bowl for wall-mounting, with open rim</b></p> <p>The cistern is not included in the delivery. If the walls are not so sturdy, the bowl must be mounted on a fixture.</p> <p>With hard white seat with SC/QR</p>	<p>5G84HR01</p>

# EASIER TO CLEAN WITH SMARTER FLUSHING

The Hygienic Flush 5G84 is a toilet bowl with an open flush rim that facilitates cleaning and promotes good hygiene. The flush efficiently cleans the toilet bowl, and the innovative design with smooth surfaces ensures that there is nowhere for dirt to accumulate. The open flush rim also facilitates cleaning and minimises the need to use strong cleaning agents. Hygienic Flush features a timeless, elegant design and blends seamlessly into all bathroom environments.

TIMELESS DESIGN COMBINED WITH PERFECT FUNCTION. HYGIENIC FLUSH SUITS ALL BATHROOMS.

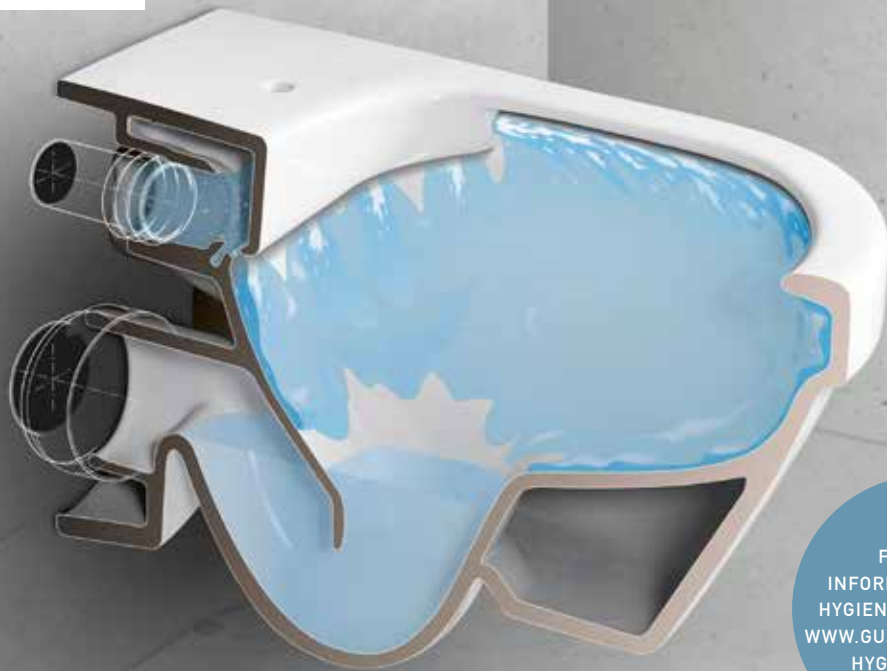

FOR MORE INFORMATION ABOUT HYGIENIC FLUSH, VISIT [WWW.GUSTAVSBERG.COM/HYGIENICFLUSH](http://WWW.GUSTAVSBERG.COM/HYGIENICFLUSH)




OPEN FLUSH RIM FOR EASIER CLEANING.




HYGIENIC FLUSH 5684 TOILET BOWL WITH SEAT AND SOFT CLOSE/QUICK RELEASE. TRIOMONT PNEUMATIC WALL-MOUNTED DUO FLUSH BUTTON IN WHITE GLASS. ARTIC WASHBASIN CABINET 4860 IN NATURAL OAK AND WASHBASIN 4551. G1 TOILET PAPER HOLDER.

# IT'S THIS SIMPLE TO INSTALL HYGIENIC FLUSH

For the best flushing results, we recommend installing the Hygienic Flush 5G84 using Gustavsberg's Triomont fixture. The Triomont fixture suits most bathrooms and helps avoid large and costly remodelling. All you actually need is at least 14 cm of depth, which is the floor space that the fixture requires. As such, it takes up no more space than a floor-mounted WC.

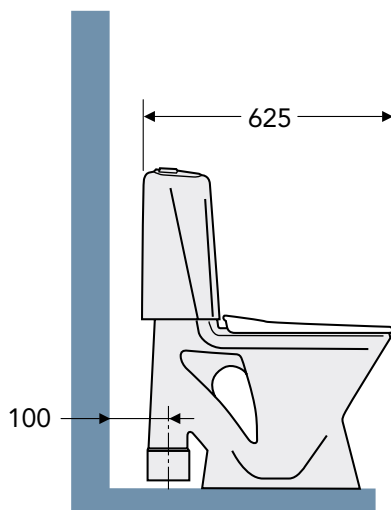

FLOOR-MOUNTED WC

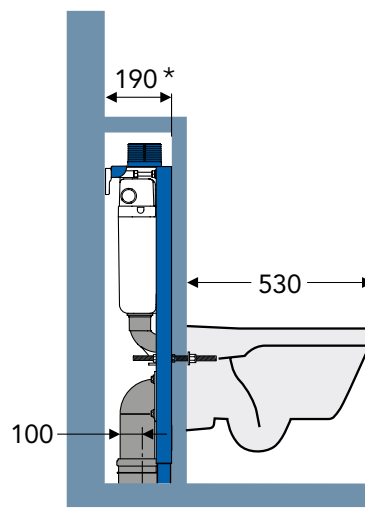

REPLACE WITH A WALL-MOUNTED  
TOILET BOWL AND TRIOMONT FIXTURE.

\*) The example presents the dimensions where the centre of the drain is 100 mm from the wall.


## GOOD TO KNOW ABOUT TRIOMONT

Triomont is a simple and flexible system, both for the fitters and for the people who use the bathroom. The design and all the materials are of the highest quality, and the system meets the most stringent test requirements for load bearing: 400 kg. In other words, you need not worry about whether the construction will take your weight.


## TOILET BOWLS

All toilet bowls from Gustavsberg can be combined with the Triomont WC fixtures. The distance between the bolts for fixing the toilet bowl in place is 180 or 230 mm to accommodate different types of bowls. As Gustavsberg is a part of Villeroy & Boch, you can also choose from this company's range of toilet bowls. If you set the distance between the bolts to 180 mm, you can use all toilet bowl models from Gustavsberg and Villeroy & Boch. There are models to suit everyone: children, tall people, short people, heavily built people, and people with special needs. There are large bowls and small bowls. There are bowls for corner installations and small spaces. And all the bowls match the Triomont fixtures from Gustavsberg – of course.


## THREE TRIOMONT SOLUTIONS

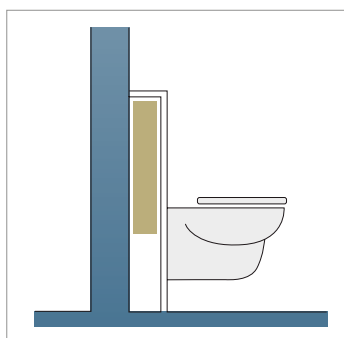

BEHIND A HALF-WALL

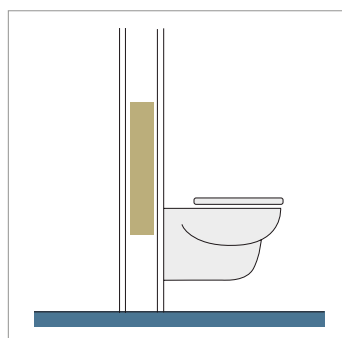

BEHIND A FULL WALL

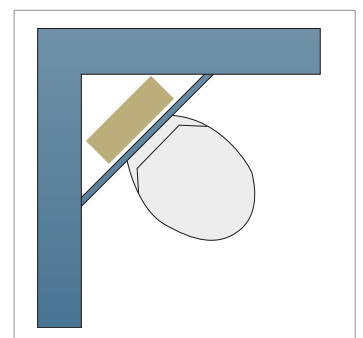

IN A CORNER

## TRIOMONT INSTALLATION SYSTEM

- SINTEF-certified, load-tested steel frame, 400 kg
- Floor or wall-connected drain
- Wall fittings included
- Adjustable flush volume
- Adjustable seat height, 410–610 mm. Recommended WC fitting, 450 mm above the floor

ART no

<p>For fitting with a wall-mounted control panel or a pneumatic flush button</p>		<p><b>Triomont XS WC fixture for wall-mounted control panel</b> High model for fitting against a straight wall or in a corner. Finish off with a wall-mounted push button or a pneumatic flushing button.</p> <p>Weight: 14 kg including packaging. Installation: the height on the sketch (1000 mm) results in a toilet seat height of around 410 mm. Adjustable up to 610 mm.</p> <p>Triomont XS for mechanical wall-mounted push button</p> <p>Triomont XS for pneumatic flushing button or pneumatic wall-mounted push button.</p> <p>Accessories: Corner fitting for corner installation Extra wall fitting (when the lower fitting supplied cannot be used).</p>	<p>GB1921102020</p> <p>GB1921102021</p> <p>GB1921102029</p> <p>GB1921102027</p>
<p>For fitting with a top-mounted control panel or a pneumatic flush button</p>		<p><b>Triomont XT WC fixture for top-mounted control panel</b> Low model for fitting against a straight wall. Finish off with a top-mounted push button or a pneumatic flushing button.</p> <p>Weight: 12 kg including packaging. Installation: the height on the sketch (830 mm) results in a toilet seat height of around 410 mm. Adjustable up to 610 mm.</p> <p>Triomont XT for mechanical top-mounted push button*</p> <p>Triomont XT for pneumatic flushing button or pneumatic top-mounted push button*</p> <p>Accessories: Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p>*) Note! For top-mounting only.</p>	<p>GB1921102024</p> <p>GB1921102025</p> <p>GB1921102027</p>

For prices, contact your dealer. We accept no liability for printing errors and reserve the right to make changes to range and specifications without notice. When making important decisions, check in advance.

### Triomont WC fixture deliveries include

- WC fixture with wall-mounting set.
- Complete cistern insulated against condensation, with flushing connection and cut-off valve.

- Connection fittings for drain and water supply (pipe in pipe).
- 4 wall fittings.
- M12 threaded bars for fitting the toilet bowl.
- Blue plastic drilling template for control panel.

- Protection plugs.
- Screws and plugs for fixing.
- Insulation protection for fitting between the toilet bowl and the wall.
- Drilling template for wall material.
- Installation instructions.

### Always finish off with:


- Toilet bowl.
- Push button/control panel.

## FLUSH NEATLY. FLUSH SMARTLY.

You can choose between wall-mounted and top-mounted push buttons, and there is even a pneumatic model. The push button you choose determines whether you can use single or dual-flush functionality. We provide a variety of models of push buttons and panels, and you can see them all at [www.gustavsberg.se/produkter/installationssystem/tryckknappar](http://www.gustavsberg.se/produkter/installationssystem/tryckknappar)

### Wall-mounted control panel


Mechanical or pneumatic control panel for placing in a fixed position on the wall above the bowl.



Pneumatic wall-mounted control panel, Duo, white glass.

### Top-mounted control panel



Mechanical or pneumatic control panel for placing in a fixed position on top of a half-wall.



Mechanical top-mounted control panel, Duo, polished chrome, plastic.

### Pneumatic flush button

Air-controlled single-flush button that you can position anywhere within 1.5 m of the fixture.

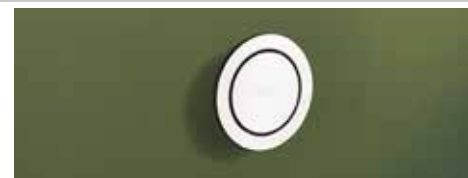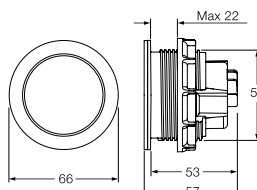

Pneumatic flush button, stainless.

VISIT OUR WEBSITE AT  
WWW.GUSTAVSBERG.SE FOR  
EVEN MORE INSPIRATION AND  
OUR FULL RANGE OF PRODUCTS.



#### SUPPORT AND SERVICE

---

Our website also contains manuals and instruction videos, as well as tips and hints to help you use and care for your Gustavsberg products. To contact our customer service staff, send an e-mail to [info@gustavsberg.com](mailto:info@gustavsberg.com)



A MEMBER OF THE  
VILLEROY & BOCH GROUP

Villeroy & Boch Gustavsberg AB  
Box 400, 134 29 Gustavsberg  
Telefon 08-570 391 00  
[www.gustavsberg.se](http://www.gustavsberg.se) [info@gustavsberg.com](mailto:info@gustavsberg.com)