

GUSTAVSBERG/ WALL-MOUNTED

GUSTAVSBERG /
SMARTER BATHROOMS



TRIOMONT – THE SIMPLEST SOLUTION FOR WALL-MOUNTED

14 CM IS ALL YOU NEED

Are you dreaming of a bathroom with wall-mounted porcelain? Triomont is a system from Gustavsberg that will make it quick and easy for you to bring your dream to life.

Triomont is simple to install and suits most bathrooms – there is no need for costly renovation work, and you can even install it in corners or small spaces with a minimum of surface loss. In fact, all you need is at least 14 cm of depth to a wall to accommodate the fixture. But of course you have to take into account the location of the drain in the floor.

The space where you position the fixture must have a wet room membrane, but if you choose to install a Triomont solution behind an added wall in your existing bathroom, you have already dealt with that issue! Just make sure to seal any holes you drill in the bathroom wall tightly with silicone. But you can, of course, use Triomont if you are building a new bathroom from scratch.

Just remember that special regulations and requirements apply to wet rooms. You can install most of our products yourself, but we recommend that you call on a professional fitter to help you with bathroom fixtures.

If you choose to do the work yourself, it is a good idea to consult a professional first – your reseller, for example, or a plumber or a specialist at your local DIY store.

It is simple to fit the drain trap, which is easy to rotate if the connection is located to the right or to the left of the fixture. Insulation protection for fitting between the porcelain and the wall is included. This evens out minor irregularities in the wall behind the toilet.

5 cm

10 cm

14 cm – no deeper than this!



All wash basins with c-c bolt spacing up to 280 mm, fits on the washbasin fixture. One advantage is that you avoids exposing all the water and drain pipes.

NEAT, COMFORTABLE, PRACTICAL AND HYGIENIC

Wall-mounted bathroom products provide a range of benefits: They allow you to take full advantage of the bathroom space, and even make the room appear larger. In addition, they are hygienic and easy to clean. If you build a half wall, you can use the top of it for storage or as pure decoration. There is also a fixture for installing wall-mounted washbasins. This makes it simple for you to carry out a neat, stable installation without having to reinforce the walls. And with the wall-fitted drain connection, almost all the pipework will be hidden from view.

GOOD TO KNOW

Triomont is a simple and flexible system, both for the fitters and for the people who use the bathroom.

TOP QUALITY – CAN HANDLE UP TO 400 KG!

The design and the materials are of the highest quality, and the Triomont toilet fixture meets the most stringent test requirements for load bearing: 400 kg.


PLUMBING

The water connection to the toilet can be made from the top or from the side of the cistern (see the installation instructions for the individual models). Extra-long drain pipes/flush pipes for thick walls are included. The cistern is designed for connection using pipe-in-pipe technology. Can accommodate protective pipes with a dimension of 18–28 mm. An eccentric drain reduction sleeve – 90/110 mm – is also included.


SIMPLE TO INSTALL WALL-MOUNTED TOILET

The Triomont fixture suits most bathrooms and helps avoid large and costly remodelling. All that is required is a floor surface of minimum 14 cm of space next to the wall. In other words, the remodelled toilet need not take up more space than a floor-mounted model.

FLOOR-MOUNTED TOILET

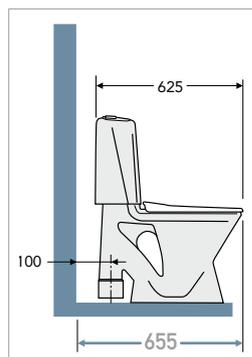

REPLACE WITH A WALL-MOUNTED TOILET ON A TRIOMONT FIXTURE

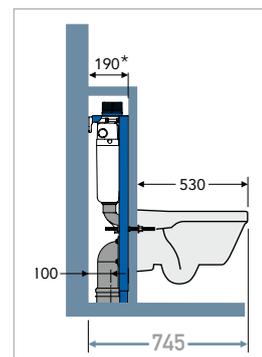

*) The example presents the dimensions where the centre of the drain is 100 mm from the wall.





WIDEST RANGE OF WALL-MOUNTED TOILETS

Triomont fixtures can be used for all wall-mounted toilets from Gustavsberg/Villeroy & Boch. There are toilets for small bathrooms, as well as models designed especially for children, for tall, short and plus size people, and for people with physical disabilities. We supply the largest range of wall-mounted toilets on the market, making it easy for you to make the best choice for you. The various models are presented later in this brochure.

CONTROL PANELS TO SUIT ALL TASTES

A variety of models and materials make it easy for you to find a style that matches your taste and bathroom layout: For wall or top mounting, for single or double flush, and for sensor-operated, mechanical or pneumatic flushing. All the different options are presented on page 12.

SMART DETAILS TO FACILITATE INSTALLATION

In order to facilitate handling and to prevent damage during installation, the fixtures are supplied with protective covers for the toilet and wall-mounted flush connections. No special tools are required to maintain or to replace the float and flush valve. The shut-off valve is easily accessible in the cistern. The cistern itself is accessed either through the hole behind the button or via the top panel of a half wall.

DIMENSIONS, FITTING AND PROTECTION AGAINST WATER DAMAGE

The fixture is just 380 mm wide, which means it fits neatly into corners and compact spaces, and special brackets are available to make corner mounting even easier. Thanks to the slim dimensions, the fixture is suitable for walls with a centre-to-centre stud distance of 450 mm. Four wall brackets are included in the delivery so there is no need for you to drill into the floor. The distance between the bolts for fixing the wall-mounted toilet in place is 180 or 230 mm to accommodate different models.

INSTALLATION VARIANTS OF TRIOMONT TOILET FIXTURE



BEHIND A HALF WALL



BEHIND A FULL WALL



IN A CORNER


FLUSH NEATLY. FLUSH SMARTLY.

Control panels in a variety of models and materials make it easy for you to find a style that matches your taste and bathroom layout. You can choose between wall-mounted and top-mounted panels, and there is even a pneumatic version. Or why not choose the latest model, which is sensor controlled and therefore touch-free. It is the control panel that determines whether you can have a single or dual flush.

FULL CONTROL WITH A FINELY DESIGNED APP

The Gustavsberg app makes it easy to change the sensor-controlled flush settings via your mobile phone or tablet. For example, you can choose to have the toilet "wake up" when you approach, or flush when you walk away. This is naturally a fantastic solution for public settings – and for home environments, where some family members may be careless or a bit

forgetful ... You can also define and adjust automatic flushing at set intervals. The app also lets you control the flush button light settings. LED lighting opens the door to every colour choice imaginable! More information can be found at www.gustavsberg.se. The app is found where apps are available. Download free of charge, it is called Gustavsberg Triomont.

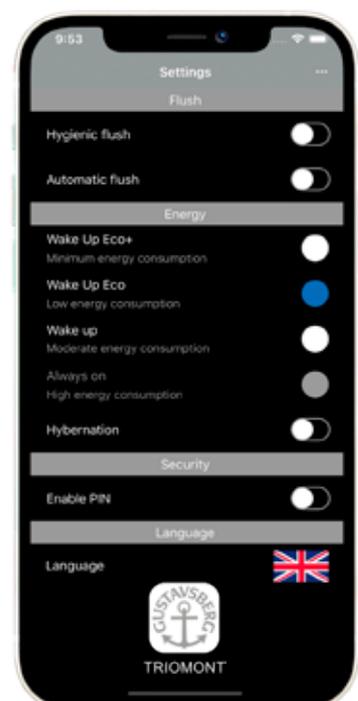



SENSOR-CONTROLLED PANEL

Sensor-controlled flushing was originally developed for public settings. Touch-free technology improves hygiene and makes things easier for users with disabilities. With a wall-mounted toilet from Gustavsberg, combined with a designer, sensor-controlled panel, your bathroom will be more hygienic, more practical – and seriously cool!



1 WALL-MOUNTED CONTROL PANEL


Mechanical, sensor-controlled or pneumatic panel for placing in a fixed position on the wall above the toilet.

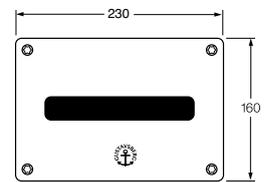

Sensor-controlled panel designed for public settings has different dimensions to other wall-mounted panels.


2 TOP-MOUNTED CONTROL PANEL

Mechanical or pneumatic panel for placing in a fixed position on top of a half-wall.



3 PNEUMATIC FLUSH BUTTON

Air-controlled single-flush button that you can position anywhere within 1.5 m of the fixture.



Always install some type of inspection hatch to access the valves in the cistern when selecting the pneumatic flush button



SMART SYMBOLS FOR SMART SOLUTIONS



HYGIENIC FLUSH

Smarter flushing for improved hygiene and easier cleaning. The innovative design with open rim and smooth surfaces eliminates all potential dirt traps. Hygienic flush minimises the need to use strong cleaning agents.



CERAMICPLUS = C+

Many of our products are available with ceramicplus surface treatment. This provides the porcelain with a dirtrepellent surface that prevents the accumulation of limescale and dirt. Ceramicplus is also good for the environment, as it means that you can use a milder detergent – and less of it! – When cleaning.



QUICK RELEASE

With quick-release functionality, you can remove the toilet seat from the bowl easily and without tools. The seat and toilet can then be cleaned separately, which is both simpler and more hygienic.



SOFT CLOSE

Hard, solid toilet seats have previously been associated with loud noises when they are lowered. Soft close functionality has solved this problem through the introduction of a damper that is built into the seat to ensure that it can be lowered gently and quietly. The damper has no direct contact with the porcelain, which facilitates cleaning and makes the seat more hygienic.




SUPRAFXIX

The patented Suprafix system simplifies installation of your wall-mounted toilet and cuts installation time. Built-in wall fitting for invisible installation of wall-mounted toilets. Neater design, free from dirt traps, means improved hygiene and simpler cleaning.



Watch the video about suprafix at [youtube.com/gustavsbergfilm](https://www.youtube.com/gustavsbergfilm)



NO ROOM FOR DIRT

On toilets with porcelain covers, the "seam" between the seating ring and the cover has been moved up. A soft curve in the porcelain simplifies cleaning and prevents the build-up of dirt. The foot of the toilet is smooth to facilitate cleaning and improve hygiene.



QUIET AND DRY

The fully encompassing porcelain cistern conceals a separate inner tank. This reduces noise and counteracts the build-up of condensation on the cistern, helping prevent the accumulation of dust.



SENSOR-CONTROLLED FLUSH

A touch-free flush function means improved hygiene. Using an app, the function can be set to flush automatically when the user walks away, or to flush at hygienic intervals if the toilet is used infrequently. Touch-free is a smart solution for all users, both at home and in public environments.



MOUNTING

You can install most of the products yourself. However, this symbol means that we recommend that you consult a skilled professional, such as a plumber, a tiler or an electrician.




CONCEALED FIXTURE SYSTEM

Wall fitting for concealed installation of wall-mounted toilets. Neater design, free from dirt traps, means improved hygiene and simpler cleaning.



FLEXIBLE BOLT SPACING

Flexible bolt spacing makes it possible to replace your existing wall-mounted toilet with a new model, regardless of whether the distance between the bolts on the wall is 180 or 230 mm.



FLEXIBLE BOLT SPACING

Flexible bolt spacing makes it possible to replace your existing wall-mounted washbasin with a new model, regardless of whether the distance between the bolts on the wall is 280 or 350 mm.

IMPORTANT TO REMEMBER:



Make sure to perform the installation professionally according to the guidelines supplied and the applicable construction regulations. This will eliminate the risk of water damage.



You can also watch our installation video online at www.gustavsberg.com.

SMART DETAILS FOR EASY INSTALLATION



1 Upper wall fitting. Can be replaced with a corner fitting for corner installation.



5 Distance between bolts (centre to centre): 180 or 230 mm. With a centre to centre distance of 180 mm, it suits all toilets from Gustavsberg and Villeroy & Boch.



2 Lead-through for pipe-in-pipe system – protective pipe, 18–28 mm. The picture shows a Triomont XT fixture. The XS model does not have the blue part.



6 Angled drain connection and eccentric sleeve, 90 x 110 mm for simple installation.



3 Installed 1 metre above the finished floor, it provides a sitting height of 410-430 mm, depending on chosen toilet model. On installation this can be adjusted up to 610-630 mm.



7 Protective plugs fitted to protect the connections during installation.



4 Wall-mounted control panel. Several models and colours are available. You can see them all on page 12.



8 The bottom wall fitting eliminates the need to drill holes in the floor to install the fixture.

WALL-MOUNTED TOILETS WITH INTERNAL CISTERN



All wall-mounted toilets from Gustavsberg and Villeroy & Boch can be used with the Triomont fixture. This allows you to choose from a wide variety of designs, and covers many special needs as well. The various models are presented later in this brochure.

WALL-MOUNTED WASHBASINS



Neat installation with a minimum of visible pipes. Suits all washbasins with a bolt distance (centre to centre) of up to 280 mm.

WALL-MOUNTED TOILETS WITH EXTERNAL CISTERN



Suits wall-mounted toilets (with external cistern) with a bolt distance of 180 or 230 mm.

TRIOMONT CONTROL PANELS

- Numerous models and materials to choose from
- The panel you choose determines single or dual flush
- Dimension sketches for panels – see page 9.

NB The header line for the different control panels below states whether they match fixture XS or XT. Please make sure to choose a panel that matches the fixture you have ordered.

WALL-MOUNTED CONTROL PANELS, DUAL FLUSH FOR TRIOMONT XS



White
ART-nr GB1921102035



Matt chrome
ART-nr GB1921102036



Shiny chrome
ART-nr GB1921102037



White
ART-nr GB1921102030



Shiny chrome
ART-nr GB1921102032



White
ART-nr GB1921102052



Shiny chrome
ART-nr GB1921102053



White metal, without logo
ART-nr GB1921102045



Shiny chrome, metal, without logo
ART-nr GB1921102047



Matt black
ART-nr GB1921102049



Stainless
ART-nr GB1921102054



White, glass
ART-nr GB1921102056



Black, glass
ART-nr GB1921102057



Aluminium
ART-nr GB1921102058



Matt black aluminium
ART-nr GB1921102048

PNEUMATIC WALL-MOUNTED CONTROL PANELS, DUAL FLUSH FOR TRIOMONT XS



White
ART-nr GB1921102060



Shiny chrome
ART-nr GB1921102061



White, glass
ART-nr GB1921102066



Black, glass
ART-nr GB1921102067

PNEUMATIC BUTTON, SINGLE FLUSH FOR ALL FIXTURE MODELS



Stainless
ART-nr GB1921102092



Make sure to install some kind of inspection hatch to reach the valves in the built-in-cistern, when choosing a pneumatic button.

SENSOR-CONTROLLED*) WALL-MOUNTED CONTROL PANELS FOR TRIOMONT XS

DUAL FLUSH



White
ART-nr GB1921102070

SINGLE FLUSH



For public settings, stainless
ART-nr GB1921102072

*) Always complete sensor controlled panels with:
Battery box
ART-nr GB1921102077
or with
230V connector
ART-nr GB1921102078

TOP-MOUNTED CONTROL PANELS FOR TRIOMONT XT



White
ART-nr GB1921102080



Shiny chrome
ART-nr GB1921102081



Black, glass
ART-nr GB1921102083

PNEUMATIC TOP-MOUNTED CONTROL PANELS, DUAL FLUSH FOR TRIOMONT XT



White
ART-nr GB1921102085



Shiny chrome
ART-nr GB1921102086

TRIOMONT TOILET FIXTURE

- Neat installation with a minimum of visible pipes
- Wide range of control panels in a variety of styles
- Choose high or low flush volume
- We supply the widest range of wall-mounted toilet bowls on the market
- Adjustable flush volume – see installation instructions supplied
- Space-efficient design, just 380 mm wide
- Wall fittings included. No need to drill holes in the floor
- Rotatable wall fittings for a flexible wall connection
- Sitting height 410–630 mm. Recommended sitting height, 450 mm above the floor
- Floor- or wall-connected drain
- Load tested to 400 kg
- SINTEF-certified (SE)
- Fixture in line with SS 820200 standard
- Cistern in line with EN 14055
- Suitable for AMA installation without extra components (SE)

ART-nr

		<p>Triomont XS fixture for wall-mounted or pneumatic control panel High model for fitting against a straight wall or in a corner. Add a control panel and wall-mounted toilet to complete. The control panel determines the type of flush, see page 12.</p> <p>Triomont XS, dual flush 4.5/3-litre or single flush 4.5-litre Triomont XS, dual flush 6/3-litre or single flush 6-litre</p> <p>ACCESSORIES: Corner fitting for corner installation Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p> Installation: The height on the sketch (1000 mm) results in a toilet seat height of 410-430 mm, depending on toilet model. On installation, this can be adjusted up to 610-630 mm. Weight: 14 kg including packaging.</p>	<p>GB1921102026 GB1921102020 GB1921102029 GB1921102027</p>
		<p>Triomont XT fixture for top-mounted or pneumatic control panel Low model for fitting against a straight wall. Add a control panel and wall-mounted toilet to complete. The control panel determines the type of flush, see page 12.</p> <p>Triomont XT, dual flush 6/3-litre or single flush 6-litre.</p> <p>ACCESSORIES: Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p> Installation: The height on the sketch (830 mm) results in a toilet seat height of 410-430 mm depending on toilet model. On installation, this can be adjusted up to 610-630 mm. Weight: 12 kg including packaging</p>	<p>GB1921102024 GB1921102027</p>
		<p>Triomont XS Vario fixture for wall-mounted or pneumatic control panel Primarily intended for hospitals and care homes. High model for fitting against a straight wall or in a corner. With adjustable sitting height after installation. Add a control panel and wall-mounted toilet to complete. The control panel determines the type of flush, see page 12.</p> <p>Triomont XS Vario, dual flush 6/3-litre or single flush 6-litre.</p> <p>ACCESSORIES: Corner fitting for corner installation Extra wall fitting (when the lower fitting supplied cannot be used).</p> <p> Installation: The height on the sketch (1000 mm) results in a toilet seat height of 410-430 mm, depending on toilet model. On installation, this can be adjusted up to 610-630 mm. After installation, the toilet can be raised 100 mm. It can naturally also be returned to its original position. Weight: 19 kg including packaging.</p>	<p>GB1921102022 GB1921102029 GB1921102027</p>

Triomont toilet fixture deliveries include:

- Fixture with four wall fittings
- Complete cistern insulated against condensation, with flush fitting and shut-off valve
- Connection components for drain and water supply (pipe in pipe)
- Hole template for button
- M12 threaded bars for fitting the toilet

- Protection plugs
- Screws and plugs for fixing
- Insulation protection for fitting between the porcelain and the wall
- Drilling template for wall
- Installation instructions


Always finish off with

- Wall-mounted toilet
- Control panel

TRIOMONT TOILET FIXTURE ALL-IN-ONE

- Neat installation with a minimum of visible pipes
- Toilet, fixture and control panel all included in the package
- Hygienic Flush with open flush rim for easier cleaning. Flushes all the way up to the rim for improved hygiene
- Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws = Estetic model
- Adjustable flush volume – see installation instructions supplied
- Space-efficient design, just 380 mm wide
- Wall fittings included. No need to drill holes in the floor
- Rotatable wall fittings for a flexible wall connection
- Sitting height 410–630 mm. Recommended sitting height, 450 mm above the floor
- Floor- or wall-connected drain
- Load tested to 400 kg
- SINTEF-certified (SE)
- Fixture in line with SS 820200 standard
- Cistern in line with EN 14055
- Suitable for AMA installation without extra components (SE)

ART-nr

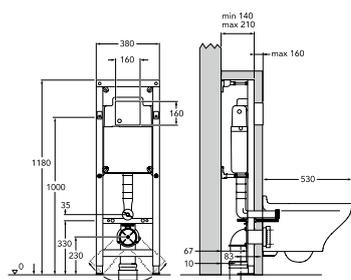

Triomont XS fixture, including Estetic toilet and control panel

High model for fitting against a straight wall or in a corner. Complete package including pneumatic control panel for dual flush 4.5/3 liters (GB1921102060) and Estetic toilet (GB1183300R1030). The Toilet features Hygienic flush for improved hygiene and Suprafix for quick and easy installation.

Triomont XS, dual flush 4.5/3-litre including Estetic toilet

GB1921102201

ACCESSORIES:


Corner fitting for corner installation
Extra wall fitting (when the lower fitting supplied cannot be used).

GB1921102029

GB1921102027



Installation: The height on the sketch (1000 mm) results in a toilet seat height of 410-430 mm, depending on toilet model. On installation, this can be adjusted up to 610-630 mm. Weight: 14 kg including packaging.

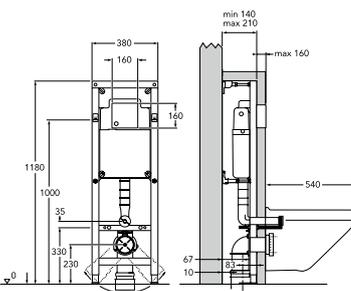

Triomont XS fixture, including Nordic³ toilet and control panel

High model for fitting against a straight wall or in a corner. Complete package including control panel for dual flush 4.5/3 liters (GB1921192935) and Nordic3 HF toilet (GB11363001030). The Toilet features Hygienic flush for improved hygiene.

Triomont XS, dual flush 4.5/3-litre including Nordic3 HF toilet

GB1921192203

ACCESSORIES:

Corner fitting for corner installation
Extra wall fitting (when the lower fitting supplied cannot be used).

GB1921102029


GB1921102027



Installation: The height on the sketch (830 mm) results in a toilet seat height of 410-430 mm, depending on toilet model. On installation, this can be adjusted up to 610-630 mm. Weight: 12 kg including packaging

TRIOMONT INSTALLATION SYSTEM FOR WALLHUNG TOILETS WITH VISIBLE CISTERN

- Neat installation, with a minimum of visible pipes
- Load-tested 400 kg
- Floor or wall-connected drain
- Fits all wall-hung toilets with a centre to centre distance between bolts of 180 or 230 mm
- Recommended seat height, 450 mm

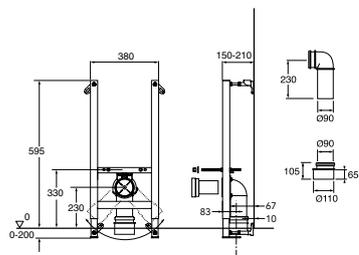

Triomont fixture for wallhung toilets with visible water cistern.

For mounting against straight wall or in a corner.

ART-nr

GB19211000510

ACCESSORIES:

Corner fitting for corner installation
Extra wall fitting (when the lower fixture supplied cannot be used).

GB1921102029

GB1921102027

Weight: 9 kg including packaging



Triomont toilet fixture deliverie include

- Fixture.
- 4 wall fittings.
- M12 threaded bars for fitting the toilet bowl.







- Screws and plugs for fixing.
- Installation instructions.
- Connecting components for wall alt. floor connection

Always finish off with

- Suitable toilet

WALL-MOUNTED TOILET, GUSTAVSBERG

- Made of hygienic, durable and tightly whiterified sanitary porcelain
- All toilets bowls can be combined with Triomont fixtures
- All Gustavsberg toilet bowls are for fitting with centre to centre measurements of 180 or 230 mm
- Load tested to 400 kg
- Several seat options
- Seat with Soft Close (SC) for gentle, quiet closing
- Seat with Quick Release (QR) for easier cleaning
- Ceramicplus (C+) as an option for simple and eco-friendly cleaning
- Hygienic Flush with open flush rim for easier cleaning, standard on most models. Flushes all the way up to the rim for improved hygiene

		<p>1530 Nautic WC bowl for wall-mounting Toilet bowl with open flush rim. For wall-mounting on fixture. Requires a minimum flush of 4,5/3 litre.</p> <p>Without seat With white standard seat With white Slim seat, a neater model of hard seat with SC/QR With white Slim seat, a neater model of hard seat with SC/QR, with C+</p> <p>SEATS: See page 17.</p> 	<p>ART-nr</p> <p>GB111530001000 GB111530001010 GB111530001040 GB1115300R1040</p>
		<p>5530 Nautic WC bowl for wall-mounting Toilet bowl with open flush rim. For wall-mounting on fixture. Requires a minimum flush of 4,5/3 litre.</p> <p>Without seat. With C+ With white standard seat</p> <p>SEATS: See page 17.</p> 	<p>GB1155300R1000 GB115530001010</p>
	 	<p>8330 Estetic for wall fitting. With C+ Toilet bowl with open flush rim. For wall-mounting on fixture with built-in cistern. Suprafix system simplifies installation. Requires a minimum flush of 4,5/3 litre.</p> <p>White with white hard seat with SC/QR Matt white with matt white hard seat with SC/QR Ebony black with Ebony black hard seat with SC/QR</p> <p>SEATS: See page 17.</p> 	<p>GB1183300R1030 GB1183300RW030 GB1183300S5030</p>
		<p>3630 Nordic³ toilet bowl for wall-mounting For wall-mounting on fixture. Requires a minimum flush of 4,5/3 litre</p> <p>Without seat With white standard seat With white hard seat with SC</p> <p>SEATS: See page 17.</p> 	<p>GB113630001000 GB113630001010 GB113630001030</p>
		<p>3635 Nordic³ short model toilet bowl for wall-mounting For wall-mounting on fixture. Requires a minimum flush of 4,5/3 litre</p> <p>Without seat With white standard seat With white hard seat with SC</p> <p>SEATS: See page 17.</p> 	<p>GB113635001000 GB113635001010 GB113635001030</p>
		<p>5G84 Hygienic Flush WC bowl for wall-mounting, with open flush rim For wall-mounting on fixture. Requires a minimum flush of 4,5/3 litre</p> <p>With hard white seat with SC/QR Without seat</p> <p>SEATS: See page 17.</p> 	<p>5G84 HR 01 5G84 R0 01</p>

		<p>4G01 Care for wall-mounting, extended model</p> <p>Wall-mounted toilet with open flush rim. Extended model for simpler transfer between wheelchair and toilet. For wall-mounting on a fixture with built-in cistern. Requires a minimum flush of 3/6 litre.</p> <p>Without seat</p> <p>SEATS: White hard seat with fixed fittings White hard seat featuring SC/QR</p>	<p>4G01 R0 01</p> <p>9M676101 9M38S101</p>
		<p>4G95 Care for wall-mounting, elevated model</p> <p>Wall-mounted toilet with open flush rim. For installing on existing fixture where higher seat height is required. For wall-mounting on a fixture with built-in cistern. Requires a minimum flush of 3/6 litre.</p> <p>Without seat</p> <p>SEATS: White hard seat with fixed fittings White hard seat featuring SC/QR</p>	<p>4G95R001</p> <p>9M676101 9M38S101</p>
		<p>1522 Nautic Hygienic Flush wall-mounted with tank</p> <p>Wall-mounted toilet with open flush rim. Designed for wall-mounting on a fixture. 2 cm free space between fixed wall and back of cistern to facilitate cleaning. With raised flush button.</p> <p>Dual flush, 2/4 litre With white standard seat Without seat With hard white seat with SC/QR, with C+ With hard white seat with SC/QR</p> <p>Single flush, 4 litre With white standard seat With hard white seat with SC/QR, with C+</p> <p>SEATS: See page 13.</p>	<p>GB11152201211 GB11152201205 GB111522R1231 GB11152201231</p> <p>GB111522401211 GB1115224R1231</p>

TOILETS SEATS

- Dimensioned to suit the different product ranges in the Gustavsberg brand

- Soft Close for quiet closing
- Quick release for simple cleaning

TOILET SEATS FOR NAUTIC

		<p>9M24 Nautic standard seat White</p> <p>Suits all toilets in the Nautic range</p>	<p>ART-nr 9M246101</p>
		<p>9M25 Nautic hard seat White with stainless steel fittings White</p> <p>Suits all toilets in the Nautic range</p>	<p>9M256101</p>
		<p>9M26 Nautic hard seat with SC and QR White Black</p> <p>Suits all toilets in the Nautic range</p>	<p>9M26S101 9M26S136</p>
		<p>8M45 Nautic Slim seat, a neater model of hart seat with SC/QR White</p> <p>Suits all toilets in the Nautic range</p>	<p>8M45S101</p>

TOILET SEATS FOR 5G84

		<p>9M16 Nautic hard seat. With SC/QR White Black</p> <p>Hard seat with stainless steel fittings White Black</p>	<p>9M16S101 9M16S136</p> <p>9889S101 9889S136</p>
--	--	---	---

TOILET SEATS FOR ESTETIC

		<p>9M09 Estetic seat with SC and QR for wall-mounted toilets White Matt white Ebony black</p> <p>9M09 Estetic seat with fixed fittings for wall-mounted toilets White</p>	<p>9M09S101 9M09S1RW 9M09S133</p> <p>9M096101</p>
--	--	---	---

TOILET SEATS FOR NORDIC³

		<p>Seats fitting Nordic³ wall-mounted toilets 8780 Nordic³ Hard seat with stainless steel fittings, white 8780 Nordic³ Hard seat with SC, white 9M64 Nordic³ Standard seat, white</p>	<p>8780G801 8780S801 9M648101</p>
--	--	--	---

CAN'T FIND THE ONE YOU'RE LOOKING FOR?

– WE HAVE OTHER TOILETS WITH THE SAME UNIQUE FLUSHING TECHNOLOGY



Since year 2000, Villeroy & Boch has owned Gustavsberg, opening up fantastic options for you to combine the best of these two bathroom worlds – and we promise that there really is something for everyone. When it comes to wall-mounted toilets, Villeroy & Boch has a broad range to match all budgets. This brochure presents a selection from

our range, where all models can be installed using the Triomont fixture. Moreover, all toilets in the selection feature Direct Flush – the smart flushing function known as “Hygienic Flush” at Gustavsberg. To view the full range of Villeroy & Boch bathroom products, contact us or visit villeroy-boch.com.

WALL-MOUNTED TOILETS, VILLEROY & BOCH

- Made of hygienic, durable and tightly whiterified sanitary porcelain
- The porcelain has the same white colour as Gustavsberg porcelain
- Suits our Triomont fixtures
- Direct Flush with open flush rim for easier cleaning. Flushes all the way up to the rim for improved hygiene
- Ceramicplus (C+) for quick, ecofriendly cleaning
- Seat with Soft Close (SC) for gentle, quiet closing and Quick Release (QR) for easier cleaning
- Load tested to 400 kg
- Distance between bolts (centre to center) 180 mm


			ART-nr
		<p>O.novo</p> <p>Wall-mounted toilet with open flush rim. Standard design with traditional shape. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>White hard seat, with SC/QR, with C+ Without seat Without seat, with C+ White hard seat, with SC/QR</p> <p>SEATS: White seat with SC/QR</p>	<p>5660 HR01 5660 R0 01 5660 R0 R1 5660 H101</p> <p>9M38 S1 01</p>
		<p>O.novo Compact</p> <p>Wall-mounted toilet with open flush rim. Like the model above but with extra short length, 490 mm only. Fits well in small bathrooms. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>White hard seat, with SC/QR, with C+ Without seat Without seat, with C+</p> <p>SEATS: White hard seat, with SC/QR White hard seat with stainless steel fittings</p>	<p>5688 HR R1 5688 R0 01 5688 R0 R1</p> <p>9M38 S1 01 9M40 61 01</p>
		<p>ViClean I100</p> <p>ViClean shower toilet is the perfect combination of a toilet and a bidet. Wall-mounted with open flush rim. The user can easily change the water temperature and pressure by remote control. Designed for wall-mounting with a fixture featuring a built-in cistern.</p> <p>White, with white hard seat Black, with black hard seat</p>	<p>VOE1 00 R1 VOE1 00 S0</p>

		<p>Subway 3.0 Twist Flush</p> <p>Wall-mounted toilet with open flush rim featuring our latest flushing technology Twist Flush. The model features a neat design with a smooth exterior. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>With seat Without seat Without seat, with C+</p> <p>SEATS: White hard seat with SC/QR White Slim seat with SC/QR Ebony seat with SC/QR</p>	<p>4670 TS 01 4670 TO 01 4670 TO R1 8M42 S1 01 9M78 S1 01 8M42 S1 55</p>
		<p>Subway 2.0</p> <p>Wall-mounted toilet with open flush rim. The model features a neat design with a smooth exterior. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>Without seat Without seat, with C+ Ebony without seat</p> <p>SEATS: White hard seat with SC/QR White hard seat, slimseat with SC/QR Ebony seat with SC/QR</p>	<p>5614 R0 01 5614 R0 R1 5614 R0 55 9M68 S1 01 9M78 S1 01 8M42 S1 55</p>
		<p>Subway 2.0 Compact</p> <p>Wall-mounted toilet with open flush rim. Just like the model above, but with compact dimensions – only 480 mm. Ideal for small bathrooms. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>Without seat Without seat, with C+</p> <p>SEATS: White hard seat with SC/QR</p>	<p>5606 R0 01 5606 R0 R1 9M69 S1 01</p>
		<p>Subway 2.0 Comfort</p> <p>Wall-mounted toilet with open flush rim. Broader and longer interior dimensions to improve sitting comfort. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>Without seat Without seat, with C+</p> <p>SEATS: White hard seat, comfort with SC/QR</p>	<p>4609 R0 01 4609 R0 R1 9M86 S1 01</p>
		<p>Architectura</p> <p>Wall-mounted toilet in a modern design with an open flush rim. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>With white hard seat with SC/QR With white hard seat featuring SC/QR, with C+</p>	<p>5685 HR 01 5685 HR R1</p>
		<p>Venticello</p> <p>Wall-mounted toilet with open flush rim. Quick and easy to install with Suprafix, where the entire toilet is fitted through the holes for the seat; no visible screws. Designed for wall-mounting with a fixture featuring a built-in cistern. Requires a minimum flush of 4,5/3 litre.</p> <p>With white hard seat, with SC/QR, with C+ Without seat Without seat, with C+</p> <p>SEATS: White hard seat, slimseat line with SC/QR (line model is an extra slim model) White hard seat, slimseat with SC/QR</p>	<p>4611 RS R1 4611 R0 01 4611 R0 R1 9M80 S1 01 9M79 S1 01</p>

TRIOMONT WASHBASIN FIXTURE

- Neat installation with a minimum of visible pipes
- Suits all washbasins with a bolt distance (centre to centre) of up to 280 mm
- Load tested to 175 kg

ART-nr

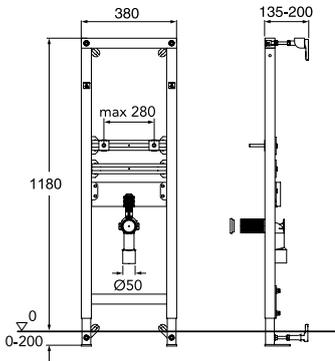

Triomont XS washbasin fixture. Tall model for fitting against a straight wall or in a corner.

Triomont XS washbasin fixture

SUPPLEMENTS

Corner fitting for corner installation
Extra wall fitting (when the bottom fitting supplied cannot be used).

Weight: 11 kg including packaging

GB1921102100

GB1921102029
GB1921102027

Triomont washbasin fixture deliveries include:

- Fixture with four wall fittings.
- M12 threaded bars for fitting the washbasin.
- Screws and plugs for fixing.
- Angled drain connection with Ø 32 mm rubber nipple.
- Installation instructions


Always finish off with:

- Washbasin.
- Washbasin mixer.
- Water trap for wall-connection.
- Bottom valve

BATHROOM SINK NORDIC³

- Made of hygienic, durable and tightly vitrified sanitary porcelain
- Functional design, standard dimensions
- For bolt or bracket installation

ART-nr




410050 Nordic³ for bolt- or bracket installation, 500 x 370 mm

With hole for a mixer.

Recommended bracket length 195 or 240 mm.

41005001



410055 Nordic³ för bult- eller konsolmontage 550 x 435 mm

With hole for a mixer.

Recommended bracket length 260 mm.

41005501

BATHROOM SINK NAUTIC

- Easy-to-clean, minimalistic design in a range of sizes, 40–70 cm
- Elliptical basin with generous flat surfaces
- For bolt or bracket installation
- C+ as an option for simple and eco-friendly cleaning
- Mixer and bottom valve are not included, must be ordered separately.

			ART-nr
		<p>5540 Nautic for bolt mounting. 400 x 275 mm. With mixer hole to the right With mixer hole to the left</p> <p>5540 Nautic for bolt, leveres med bolter, 400 x 275 mm, med C+ With mixer hole to the right With mixer hole to the left</p> 	<p>55409R01 55409L01</p> <p>55409RR1 55409LR1</p>
		<p>5550 Nautic for bolt and bracket mounting*. 500 x 380 mm With mixer hole Without mixer hole With mixer hole, without overflow**</p> <p>5550 Nautic for bolt and bracket mounting*. 500 x 380 mm, with C+ With mixer hole Without mixer hole With mixer hole, without overflow**</p> <p>* Recommended bracket length: 195 or 240 mm ** Mounting with strainer valve recommended</p> 	<p>55509901 55509701 55509801</p> <p>555099R1 555097R1 555098R1</p>
		<p>5556 Nautic for bolt and bracket mounting*. 560 x 430 mm With mixer hole Without mixer hole With mixer hole, without overflow**</p> <p>5556 Nautic for bolt and bracket mounting*. 560 x 430 mm, with C+ With mixer hole Without mixer hole With mixer hole, without overflow**</p> <p>* Recommended bracket length 260 mm ** Mounting with strainer valve recommended</p> 	<p>55569901 55569701 55569801</p> <p>555699R1 555697R1 555698R1</p>
		<p>5560 Nautic for bolt and bracket mounting*. 600 x 460 mm With mixer hole Without mixer hole With mixer hole, without overflow** Without mixer hole, without overflow**</p> <p>5560 Nautic for bolt and bracket mounting*. 600 x 460 mm, with C+ With mixer hole Without mixer hole With mixer hole, without overflow** Without mixer hole, without overflow**</p> <p>* Recommended bracket length 260 mm ** Mounting with strainer valve recommended</p> 	<p>55609901 55609701 55609801 55609M01</p> <p>556099R1 556097R1 556098R1 55609MR1</p>

BATHROOM SINKS, CARE

• To view other products for special needs, visit www.gustavsberg.com

		<p>1704 raising device with gas suspension* Fits washbasin with max. width 640 mm. Possible height adjustment 315 mm. The lever can be placed on left- or right hand side of washbasin."</p> <p>1708 Flexible hose set</p> <p>* Washbasins, mixers and hoses are not included</p>	<p>ART-nr GB88170401</p> <p>GB88170801</p>
		<p>7119 60 for bolt fitting, 600 x 490 mm With mixer hole, overflow and bottomvalve</p>	<p>GB157119630110</p>
		<p>740 for bolt installation, 600 x 600 mm. Extra shallow basin to accommodate wheelchair users.</p> <p>With mixer hole, without overflow outlet</p> <p>With mixer hole, with overflow outlet</p>	<p>GB1074010102</p> <p>GB1074010101</p>
		<p>4G1955 for bolt installation, 560 x 550 mm. Wheelchair-friendly, with shallow basin. Smooth underside with grip profile and leg space. Smooth, easy-to-clean surfaces.</p> <p>With mixer hole, with overflow outlet</p>	<p>4G195501</p>
		<p>4G1960 for bolt installation, 610 x 550 mm. Wheelchair-friendly, with shallow basin. Smooth underside with handle and leg space. Smooth, easy-to-clean surfaces.</p> <p>With mixer hole, with overflow outlet</p> <p>With mixer hole, with overflow outlet</p>	<p>4G196101</p> <p>4G196001</p>
		<p>4G2080 for bolt installation, 800 x 550 mm. Wheelchair-friendly, with shallow basin. Smooth underside with handle and leg space. Plenty of space for toiletries.</p> <p>With mixer hole, with overflow outlet</p>	<p>4G208001</p>



PORCELAIN ADVANTAGES

"GENUINE VITREOUS CHINA"

Is simply dense sanitary porcelain, the most hygienic and sustainable materials available for ceramic bathroom products. It provides a strong and resistant surface lasting year after year.

HYGENIC

The porcelain has a hard surface that is smooth and dense which makes it resistant to scratches, easy to keep clean and hygienic.

CERAMICPLUS

Many of our products can be obtained with the surface treatment Ceramicplus. It gives the porcelain a dirt-repellent surface which prevents limescale and dirt from taking hold. Ceramicplus is also good for the environment because it allows you to cope with less and milder detergents.

RESISTANT

High resistance to the chemicals found in the mixture of cosmetics and styling products and other that are commonly found in bathrooms. Not even nail polish leaves marks on the surface after removal.

HYGIENIC FLUSH

Smarter toilet flushing that provides better hygiene and simplifies cleaning. The innovative design with open flush rim and smooth surfaces eliminate any possible dirt traps. Hygienic flush also minimizes the need for strong detergent.

WELCOME TO GUSTAVSBERG.COM!

GET INSPIRED

On our website you will find our complete range for the bathroom and under the tab "Inspiration" you will find Gustavsberg's own online magazine, InspiredBy.

CREATE YOUR NEW BATHROOM WITH THE BATHROOM PLANNER

Inspired? Gustavsberg's bathroom planner makes it easy to try decorating your complete bathroom.

SUPPORT AND SERVICE

Our website also contains manuals and instruction videos, as well as tips and hints to help you use and care for your Gustavsberg products. Welcome to www.gustavsberg.com



A MEMBER OF THE
VILLEROY & BOCH GROUP

Villeroy & Boch Gustavsberg AB
P. O. Box 400, SE-134 29 Gustavsberg, Sweden
Phone +46 8 570 391 00
www.gustavsberg.com info@gustavsberg.com