

Blandebatteri dusj, Nordic - termostat

Utløp oppover/nedover, 160 c-c

GUSTAVSBERG /
SMARTERE BADEROM



Produktets funksjoner



- Safe Touch reduces the heat on the front of the mixer
- Maintains even water temperature during pressure and temperature changes
- Can be completed with bathtub spout or shower set

Artikkelnummer mv.

NRF-nr:

ART-nr:

EAN-nr:

GB41201702

7391530076508

Emballasje



L: 292,00 x W: 95,00 x H: 74,00 mm.

Vekt: 1,72 kg

Anbefalt utsalgspris

4 693 NOK (3754 NOK ekskl. skatt)

Energimerking og sertifiseringer

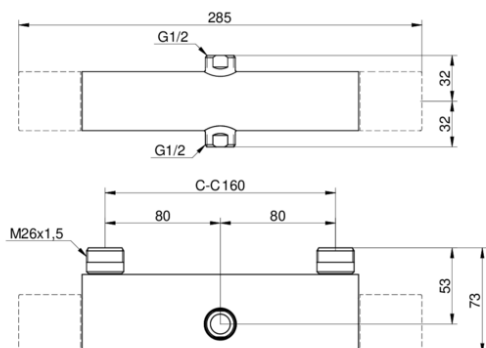

Montering og vedlikehold

Vanntilførselsrør må gjennomspyles. Kranen kobles til kaldtvannsrøret på høyre side og varmtvannsrøret på venstre side. Vanntrykk: maks. 1000 kPa, min. 50 kPa. Varmtvannstemperatur: maks. 80 °C, min. 45 °C. Merk at vi ikke er ansvarlige for skader som følge av feil installasjon.

