

Blandebatteri dusj, New Nautic - termostat, 40 c-c

Blyfri, utløp oppover/nedover, tilkobling kan forskyves

GUSTAVSBERG /
SMARTERE BADEROM



Produktets funksjoner



- Safe Touch reduces the heat on the front of the faucet
- Maintains even water temperature during pressure and temperature changes
- Contains less than 0.1% lead

Artikkelnummer mv.

NRF-nr:

ART-nr:

EAN-nr:

GB412024020

7391530076362


Emballasje

L: 292,00 x W: 95,00 x H: 74,00 mm.


Vekt: 1,91 kg

Anbefalt utsalgspris

4 730 NOK (3784 NOK ekskl. skatt)

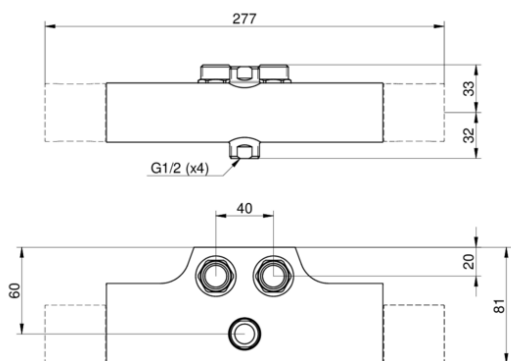

Energimerking og sertifiseringer



Montering og vedlikehold

Vanntilførselsr r m  gjennomspyles. Kranen kobles til kaldtvannsr ret p  h yre side og varmtvannsr ret p  venstre side. Vanntrykk: maks. 1000 kPa, min. 50 kPa. Varmtvannstemperatur: maks. 80  C, min. 45  C. Merk at vi ikke er ansvarlige for skader som f lge av feil installasjon.

